


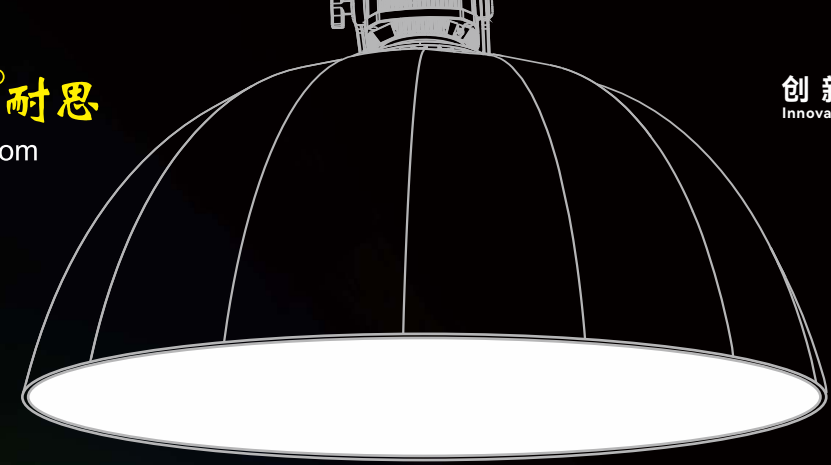

NiceFoto®耐思

www.SZNiceFoto.com

www.NiceFoto.cn

创新灯光·光影使命
Innovative Lighting · Cinematic Commitment

深圳市耐思摄影器材有限公司 Shenzhen Nice Photographic Equipment Co.,Ltd

地址：深圳市龙岗区平湖街道 平龙东路349号
电话：0755-28753927
网址：www.NiceFoto.cn
E-mail: marketing@nicefoto.cn

Add : No.349, Pinglong east road, Pinghu street.
Longgang district, Shenzhen, China.518111
Tel: +86-755-84709123 /URL : www.szNiceFoto.com
E-mail: Sales@nicefoto.cn / marketing@nicefoto.cn




耐思官网(中文版)
NiceFoto website (CN)



耐思官网(英文版)
NiceFoto website (EN)



微信公众号
Wechat



Instagram账号
NiceFotoGlobal

* 本公司产品不断升级、更新，技术参数功能等仅供参考；如有变更恕不另行通知，图片与实物有细微差别，均以实物为准！
* 本画册上所有内容均经过认真核对，如有任何印刷错漏或内容上的误解，本公司保留最终解释权。
Warmtips: In order to grasp the operation of this product quickly, please read the instruction manual before operating;
As the product is updating all the time, so different batches of products will have some changes,
please all in kind of prevail, thanks so much for your kind understanding.

NiceFoto 耐思

影视灯/Video light

深圳市耐思摄影器材有限公司

2025

稳定正色
Consistent And Color-accurate Lighting
全光谱·低蓝
Full Spectrum Low Blue Light

光



影视灯/Video light

2025.2



深圳市耐思摄影器材有限公司，二十年专注于电影影视器材研发与设计、制造、销售。拥有专业的技术队伍，先进的测试设备，完善的质量管理体系，以“创新影视器材产品，服务影视行业”为己任，经过不断的技术更新与发展，已成为领衔行业的知名品牌。

我们专注研发：电影光源产品、直播光源产品、摄影光源产品、手机影视光源产品、稳定器及各种布光道具、广告拍摄附件等系列产品，耐思产品均通过了CE、RoHS、PSE、FCC认证。

Shenzhen NiceFoto Photography Equipment Co., Ltd.

For over 20 years, NiceFoto has been dedicated to the R&D, design, manufacturing, and sales of professional film and video equipment. With a highly skilled technical team, advanced testing facilities, and a comprehensive quality management system, we are committed to innovating film equipment and serving the film industry. Through continuous technological advancements, we have grown into a leading and well-recognized brand in the industry.

Our Expertise Includes:
Cinematic lighting solutions
Live streaming lighting systems
Photography lighting equipment

All NiceFoto products are certified with CE, RoHS, PSE, and FCC standards, ensuring high quality, safety, and reliability.



车间生产
Production line



产品设备
Product equipment



专业设备
Professional equipment

经得起每一次的考验

华丽过后，依然自我

强劲、执着、携手共铸辉煌明天

We are strong enough to overcome each difficulty.

Always being ourselves, no matter what happens.

Being powerful and persistent, let's join in hands to build a bright future.

目录 / Contents

一、影视灯 / LED video light

超越五色灯系列 / LV Series	P01-02
多色混光系列 / LV.Pro Series	P03-04
徠维系列 / LV & LA Series	P05-12

二、影视灯 / LED video light

光耀系列 / FC Series	P13-18
夕阳灯 / BL Series	P19-20

三、便携影视灯 / Portable LED video light

轻影系列 / QY Series	P21-24
阿卡系列 / AR Series	P25-28

四、光效附件 / Accessories

聚光筒/调焦器 / Projection Attachment/Focus Adjuster	P29-30
带网快装深口柔光箱 / Quick set-up deep softbox(with grid)	P31-32
八角形柔光箱 / Octagonal Softbox	P33-34
方形柔光箱 / Rectangular Softbox	P35-36
灯笼柔光箱 / Globe softbox	P37-38
Mini保荣卡口附件 / Mini bowens mount Accessories	P39-40

五、支撑附件 / Support accessories

灯架 / light stand	P41-42
------------------	--------



NiceFoto®耐思

创新灯光 · 光影使命
Innovative Lighting · Cinematic Commitment

20年
NiceFoto 18

稳定正色光

Consistent And Color-accurate Lighting

对人物肤色和物体本色有高度还原, 不偏色

灯光连续长时间运行, 光效高度一致

Highly restored to the skin tone of characters and the natural color of objects, without color deviation
The light runs continuously for a long time, and the light effect is highly consistent

全光谱·低蓝光



Full Spectrum Low Blue Light

更宽域的色温调节范围(2700K-6500K)

更低蓝光长效护眼

更精准的色彩还原

A wider range of color temperature adjustment(2500K-6500K)
Lower blue light for long-lasting eye protection
More accurate color reproduction

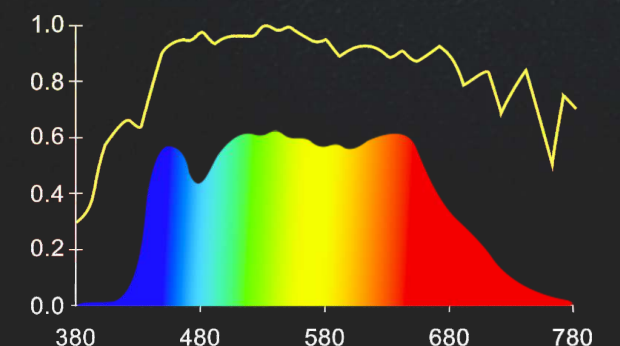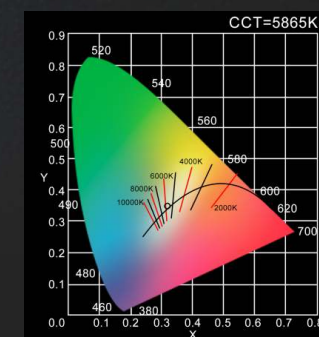



LV-3000C



超越五色灯
Beyond Five Color Lights



白光可加减红/绿 (±G/M)
可提高被摄体或人体肤色质感;亦可适应不同光色的场景环境。


360°色相及其饱和度可任意调节
提供丰富色感的光线,带来多样性的创意表达,增强画面的视觉吸引力和艺术感染力。

RGB三色任意混搭出色
提供丰富而灵动的色彩,带来多样化的视觉效果和感官体验。

Magenta-green adjustment at daylite 5600K (±G / M)
Can improve the texture of the subject or human skin color; It can also adapt to scene environments with different light colors.

360 ° hue and saturation can be adjusted freely
Provide rich color light, bring diverse creative expressions, enhance the visual appeal and artistic appeal of the picture.

Any RGB red,green and blue blending colors you desire
Provide rich and dynamic colors, bringing diverse visual effects and sensory experiences.

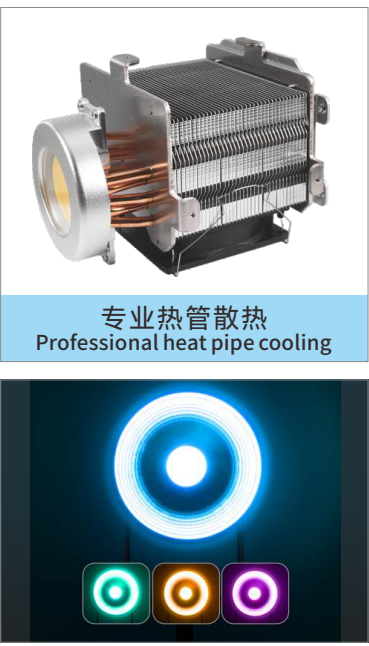


产品参数/ Product parameters

型号 / Model	LV-3000C
货号 / Item No.	640320
功率 / Power	300W
灯体输入电压 / Input voltage	AC100V-240V
显色指数 / CRI	≥96
电视照明一致性指数 / TLCI	≥96
色温 / Color temperature	(2700K-6500K)±200K
GM值调节范围 / GM value adjustment range	-1.0~1.0
色相 / Hue	H000-H360
光通量 / Luminous flux	30000LM
光照度 / Illuminance	21000Lux (灯罩, 1M / 1m with reflector)
照射角度 / Angle	120°
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)
场景光效模式/ Scene light mode	18种 / 18 kinds
色彩光源 / Color source	RGB+WW
内置接收 / Built-in receiver	APP
遥控距离 / Remote distance	≤30cm
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 Heat pipe cooling +Electronic silent fan + metal casing
包装体积和重量 / Package size and weight	59.5×30×23cm / 5kg/1pc



多色混光
Multi-color mixing

LV-3300.Pro



多色混白光
不至于偏色

Multi-color mixed white light
with out color cast



产品参数/ Product parameters

型号 / Model	LV-3300.Pro
货号 / Item No.	640240
功率 / Power	330W
灯体输入电压 / Input voltage	AC100V-240V
显色指数 / CRI	≥96
电视照明一致性指数 / TLCI	≥96
色温 / Color temperature	(1800K-10000K) ±200K
GM值调节范围 / GM value adjustment range	-1.0~1.0
色相 / Hue	H000-H360
光通量 / Luminous flux	33000LM
光照度 / Illuminance	75600Lux (灯罩, 1M/1m with reflector)
照射角度 / Angle	120°
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)
场景光效模式 / Scene light mode	18种 / 18 kinds
分组 / 频道 / Group / Channel	5个分组 / 16个频道 / 5 Groups/16 Channel
内置接收 / Built-in receiver	2.4G+APP
遥控距离 / Remote distance	≤80cm + ≤30cm
色彩光源 / Color source	红色+绿色+蓝色+柠檬绿+琥珀色+青色=任意色彩光源 Red+green+blue+lemon green+amber+cyan=any color light source
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 Heat pipe cooling +Electronic silent fan + metal casing
包装体积和重量 / Package size and weight	59.5×30×23cm / 5kg / 1pc

影视灯

徕维系列

LED video light

LV Series

双色温

Bi color

LV-6000

(600W+600W)

单色温

Daylite

LV-6000B



NiceFoto®耐思



色温在变，功率不变(LV-6000A)

- 超大功率，骄阳般亮度输出
- 全光谱，光效更出彩

丰富色感的光线，对人物肤色和物体本色，具有高度还原性，不至于偏色。

Stable power output at any color temperature(LV-6000A)

- Ultra-high power, sun-like brightness output

- Full-spectrum, better lighting effects

It can provide a rich sense of light. It is highly reducible to the skin and the nature of the object, and is not biased.



AC电源 / AC Power Supply
AC100V-240V

手控/Manual control



遥控面板
Remote control panel



手机APP/Mobile APP



专业热管散热
Professional heat pipe cooling



另购
Sold separately

遥控器/Remote controls
LED-TX100 II

产品参数/ Product parameters

型号 / Model	LV-6000A	LV-6000B
货号 / Item No.	640254	640241
功率 / Power	600W	
灯体输入电压 / Input voltage	AC100V-240V	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	60000LM	72000LM
光照度 / Illuminance	150000Lux (灯罩, 1M/1m with reflector)	188000Lux (灯罩, 1M/1m with reflector)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6 kinds	
分组 / 频道 / Group/Channel	5个分组 / 16个频道 / 5 Groups/16 Channel	
内置接收 / Built-in receiver	2.4G+APP	
遥控距离 / Remote distance	≤80cm + ≤30cm	
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 Heat pipe cooling +Electronic silent fan + metal casing	
包装体积和重量 / Package size and weight	58.2x25.5x23.5cm 6kg/1pc	

影视灯
LED video light

徕维系列
LV Series

双色温
Bi color

LV-3000A
(300W+300W)

单色温
Daylite

LV-3000B



- 色温在变，功率不变(LV-3000A)
- 全光谱，光效更出彩
- 超静音设计，专业热管散热

- Stable power output at any color temperature(LV-3000A)
- Full-spectrum, more colour ful light effects.
- Super silent, professional heat pipe dissipation.



AC电源 / AC Power Supply
AC100V-240V

手控/Manual control



遥控面板
Remote control panel



手机APP/Mobile APP



专业热管散热
Professional heat pipe cooling



另购
Sold separately

遥控器/Remote controls
LED-TX100 II

产品参数/ Product parameters

型号 / Model	LV-3000A	LV-3000B
货号 / Item No.	640242	640243
功率 / Power	300W	
灯体输入电压 / Input voltage	AC100V-240V	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	30000LM	36000LM
光照度 / Illuminance	100000Lux (灯罩, 1M/1m with reflector)	112000Lux (灯罩, 1M/1m with reflector)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6kinds	
分组/频道/Group/Channel	5个分组/16个频道/5 Groups/16 Channel	
内置接收 / Built-in receiver	2.4G+APP	
遥控距离 / Remote distance	≤80cm + ≤30cm	
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 Heat pipe cooling +Electronic silent fan + metal casing	
包装体积和重量 / Package size and weight	54.2x25.5x23.5cm 5kg/1pc	

影视灯
LED video light

徕维系列
LV Series

双色温
Bi color

LV-2000 (200W+200W)

LV-1500 (150W+150W)

单色温
Daylite

LV-2000B

LV-1500B



色温在变，功率不变 (LV-2000A) (LV-1500A)

- 全光谱，光效更出彩
- 超静音设计，专业热管散热

Stable power output at any color temperature (LV-2000A)/(LV-1500A)

- Full-spectrum, stunning lighting effects
- Super silent, professional heat pipe dissipation.




AC电源 / AC Power Supply
AC100V-240V

手控/Manual control



遥控面板
Remote control panel

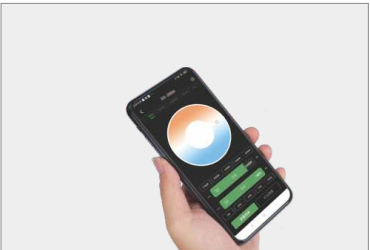

手机APP/Mobile APP



专业热管散热
Professional heat pipe cooling

另购
Sold separately



遥控器/Remote controls
LED-TX100 II

产品参数/ Product parameters

型号 / Model	LV-2000A		LV-2000B		LV-1500A		LV-1500B	
货号 / Item No.	640244		640245		640246		640247	
功率 / Power	200W				150W			
灯体输入电压 / Input voltage	AC100V-240V							
显色指数 / CRI	≥96							
电视照明一致性指数 / TLCI	≥96							
色温 / Color temperature	(2700K-6500K)±200K		5600K±200K		(2700K-6500K)±200K		5600K±200K	
光通量 / Luminous flux	22000LM		24000LM		16500LM		18000LM	
光照度 / Illuminance	80000Lux (灯罩, 1M)		90000Lux (灯罩, 1M)		60000Lux (灯罩, 1M)		70000Lux (灯罩, 1M)	
照射角度 / Angle	120°							
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)							
场景光效模式 / Scene light mode	6种 / 6 kinds							
分组/频道 / Group/Channel	5个分组 /16个频道 / 5 Groups / 16 Channel							
内置接收 / Built-in receiver	2.4G+APP							
遥控距离 / Remote distance	≤80cm + ≤30cm							
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 Heat pipe cooling +Electronic silent fan + metal casing							
包装体积和重量 / Package size and weight	42.5x21x21.5cm 4Kg/1pc							

影视灯
LED video light

徕维系列
LA Series

双色温
Bi color

LA-2000A
(200W+200W)

单色温
Daylite

LA-2000B



NiceFoto®耐思

- 全光谱(R9-R15) > 90，光效更出彩
 - 光谱相似指数SSI≥90
 - Ra(R1-R8)≥96，TLCI≥96
 - 广域色温 (2700K - 6500K)±200K (LA-2000A)
- Full spectrum (R9-R15) > 90, more colourful light effects.
 - Spectral similarity index SSI ≥ 90
 - Ra(R1-R8) ≥ 96, TLCI ≥ 96
 - Wide gamut colour temperature (2700K - 6500K) ±200K (LA-2000A)



AC电源 / AC Power Supply
AC100V-240V

手控/Manual control



专业热管散热
Professional heat pipe cooling



手机APP/Mobile APP

产品参数/ Product parameters

型号 / Model	LA-2000A	LA-2000B
货号 / Item No.	640281	640280
功率 / Power	200W	200W
灯体输入电压 / Input voltage	AC100V-240V	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	20000LM	24000LM
光照度 / Illuminance	75000Lux(灯罩, 1M/1m with reflector)	90000Lux(灯罩, 1M/1m with reflector)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6 kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30cm	
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 Heat pipe cooling +Electronic silent fan + metal casing	
包装体积和重量 / Package size and weight	34.5x23.5x18cm 2.6Kg/1pc	


影视灯

LED video light

光耀系列


FC Series

双色温
Bi color



FC-2000A

单色温
Daylite



FC-2000B



• 色温在变，功率不变(FC-2000A)

• 高亮度，高显色性

• 智能化灯控

• Stable power output at any color temperature(FC-2000A)

• High brightness, high color rendering

• Intelligent light control

手控/Manual control



AC电源 / AC Power Supply
AC100V-240V



铝材散热器
Aluminum alloy cooling



手机APP/Mobile APP

产品参数/ Product parameters

型号 / Model	FC-2000A	FC-2000B
货号 / Item No.	640378	640379
功率 / Power	200W	
灯体输入电压 / Input voltage	AC100V-240V	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	20000LM	22000LM
光照度 / Illuminance	70000Lux (灯罩, 1M/1m with reflector)	80000Lux (灯罩, 1M /1m with reflector)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6 kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30	
散热 / Cooling way	铝材散热器+电子静音风扇 Aluminum alloy cooling+Electronic silent fan	
包装体积和重量 / Package size and weight	34.5x22x28.7cm/2.9kg	

影视灯
LED video light

光耀系列
FC Series

双色温
Bi color

FC-6000A
(300W+300W)

双色温
Bi color

FC-3000A
(600W+600W)

- **大功率** · COB灯的性价比王者
- 高亮度，高显色性
- 智能化灯控
- High Power · Excellent Cost Performance
- High brightness, high color rendering
- Intelligent light control



/Reflector sold separately

600w



High Power
Excellent Cost Performance

手控/Manual control

AC电源 / AC Power Supply
AC100V-240V



专业热管散热
Professional heat pipe cooling

手机APP/Mobile APP

产品参数/ Product parameters

型号 / Model	FC-6000A	FC-3000A
货号 / Item No.	640409	640408
功率 / Power	600w	300w
灯体输入电压 / Input voltage	AC220V或AC110V / AC220V Or AC110V	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	
光通量 / Luminous flux	58000LM	30000LM
光照度 / Illuminance	150000Lux (灯罩, 1M)	85000Lux (灯罩, 1M)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6 kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30	
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 Heat pipe cooling +Electronic silent fan + metal casing	
包装体积和重量 / Package size and weight	46.5x29.2x20cm/4.2kg	40.5x29.2x20cm/3.4kg

影视灯
LED video light

光耀系列
FC Series

双色温
Bi color



FC-6000A.DMX
(300W+300W)

双色温
Bi color



FC-3000A.DMX
(600W+600W)

DMX

DMX控制，全域掌握

- 大功率 · COB灯的性价比王者
- 高亮度，高显色性
- 智能化灯控

DMX control

- High Power · Excellent Cost Performance
- High brightness, high color rendering
- Intelligent light control

多重掌控 智能调光
Versatile and smart control

DMX控制台控制 / DMX console control



手机APP
Mobile APP



一机多控
Multiple control options



专业热管散热
Professional heat pipe cooling



产品参数 / Product parameters

型号 / Model	FC-6000A.DMX	FC-3000A.DMX
货号 / Item No.	640416	640417
功率 / Power	600w	300w
灯体输入电压 / Input voltage	AC220V或AC110V / AC220V Or AC110V	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K) ±200K	
光通量 / Luminous flux	58000LM	30000LM
光照度 / Illuminance	150000Lux(灯罩, 1M)	85000Lux(灯罩, 1M)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%	
场景光效模式 / Scene light mode	6种 / 6 kinds	
内置接收 / Built-in receiver	APP+DMX	
遥控距离 / Remote distance	≤30m (APP)	
DMX	000-512	
散热 / Cooling way	热管散热+电子静音风扇+金属外壳 / Heat pipe cooling +Electronic silent fan + metal casing	
包装体积和重量 / Package size and weight	46.5x29.2x20cm/4.2kg	40.5x29.2x20cm/3.4kg


夕阳灯
Sunset Light

● BL-1000B

超大功率
夕阳氛围
Of big power, create
romantic sunset scene



效果对比
Captivating lighting

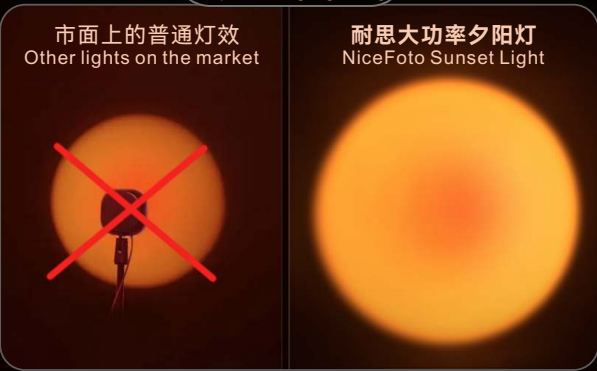

手控/Manual control



AC电源 / AC Power Supply
AC100V-240V



铝材散热器
Aluminum alloy cooling



手机APP/Mobile APP



产品参数/ Product parameters

型号 / Model	BL-1000B
货号 / Item No.	640380
功率 / Power	100W
灯体输入电压 / Input voltage	AC100V-240V
色温 / Color temperature	2000K±200K
光通量 / Luminous flux	9000LM
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)
场景光效模式/ Scene light mode	6种 / 6 kinds(APP内调节/Adjustment within the APP)
内置接收 / Built-in receiver	APP
遥控距离 / Remote distance	≤30cm
散热 / Cooling way	铝材散热器+电子静音风扇 Aluminum alloy cooling+Electronic silent fan
包装体积和重量 / Package size and weight	34.5x22x28.7cm/2.9kg

便携影视灯

Portable LED video light

双色温
Bi color



QY-2000A
(200W+200W)

单色温
Daylite



QY-2000B

轻影系列

QY Series



- 高亮度，200W专业影视灯
- 扁平纤薄设计，轻量便携
- 广域色温(2700K-6500K)±200K (QY-2000A)
- 200W professional-level,high brightness
- Slim design,high portability
- Wide illumination area



手控/Manual control



AC电源转换器 / DC电源盒 (恒流)
AC100V-240V / DC48V



手机APP/Mobile APP



产品参数/ Product parameters

型号 / Model	QY-2000A	QY-2000B
货号 / Item No.	640313	640314
功率 / Power	200W	
灯体输入电压 / Input voltage	DC48V±4A	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	20000LM	24000LM
光照度 / Illuminance	50000Lux(灯罩, 1M/1m with reflector)	80000Lux(灯罩, 1M/1m with reflector)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
快速功率 / Fastpower	0% / 20% / 40% / 60% / 80% / 100%	
快速色温 / Fast color temperature	2700K / 3200K / 5600K / 6500K	/
场景光效模式 / Scene light mode	6种 / 6kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30	
电源转换器 / AC adapter	输入电压:AC100V-240V	
	输出电压:DC48V±4A	
散热 / Cooling way	铝材散热器+电子静音风扇	
	Aluminum alloy cooling+Electronic silent fan	
包装体积和重量 / Package size and weight	25x23.5x17cm / 2.1Kg /1pc	

便携影视灯
Portable LED video light

轻影系列
QY Series

双色温
Bi color

QY-8000A
(800W+800W)

单色温
Daylite

QY-8000B



- 宽广照射面积, 大场景
- 智能灯控
- 超大功率

- Wide illumination area
- Smart control
- Big output power



AC 电源调光盒/AC Power control box



手机APP/Mobile APP



产品参数/ Product parameters

型号 / Model	QY-8000A	QY-8000B
货号 / Item No.	640392	640393
功率 / Power	800W	
灯体输入电压 / Input voltage	DC48V±17A	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	80000LM	88000LM
光照度 / Illuminance	/	/
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6kinds	
内置接收 / Built-in receiver	APP+DMX	
遥控距离 / Remote distance	≤30	
电源转换器 / AC adapter	输入电压:AC100V-240V	
	输出电压:DC48V±17A	
散热 / Cooling way	铝材散热器+电子静音风扇 Aluminum alloy cooling+Electronic silent fan	
包装体积和重量 / Package size and weight	25x23.5x17cm / 2.1Kg /1pc	

便携影视灯

Portable LED video light

双色温
Bi color



AR-1000A
(100W+100W)

单色温
Daylite



AR-1000B

阿卡系列

AR Series



Mini · Portable

便携影视灯

Portable LED video light

双色温
Bi color



AR-600A
(50W+50W)

单色温
Daylite



AR-600B



- 轻量化便携影视灯
 - 多样化供电方式，稳定续航
(AC电源/PD充电器)
 - 迷你保荣卡口，多种附件搭配
- Lightweight Portable LED video light.
 - Multiple power supply methods for stable endurance (AC power supply/PD charger)
 - Mini Bowens mount with a variety of accessories to match

标配/Includes:



灯架座
Holder



迷你口灯罩 SN-35
Mini reflector SN-35
含柔光布/with soft cloth



电源转换器PW-05
Power adapter
PW-05

产品参数/ Product parameters

型号 / Model	AR-1000A	AR-1000B
货号 / Item No.	640326	640325
功率 / Power	100W	
灯体输入电压 / Input voltage	DC24V或USB-C INPUT 20V±5A	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	12000LM	
光照度 / Illuminance	/	
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30cm	
电源转换器 / AC adapter	输入电压:AC100V-240V	
	输出电压:DC24V±6A	
散热 / Cooling way	热管散热+电子静音风扇 Heat pipe cooling +Electronic silent fan	
包装体积和重量 / Package size and weight	单灯:30.5x17.5x11.2cm/0.8Kg	标准版:34x26.5x13cm/1.3Kg
	套装:34x26.5x13cm/2.3Kg	

标配/Includes:



灯架座
Holder



迷你口灯罩 SN-35
Mini reflector SN-35
含柔光布/with soft cloth



电源转换器PW-11
Power adapter
PW-11

产品参数/ Product parameters

型号 / Model	AR-600A	AR-600B
货号 / Item No.	640310	640311
功率 / Power	50W	
灯体输入电压 / Input voltage	DC24V或USB-C INPUT 20V±5A	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / Color temperature	(2700K-6500K)±200K	5600K±200K
光通量 / Luminous flux	4500LM	5000LM
光照度 / Illuminance	6200Lux(灯罩, 1M/1m with reflector)	9000Lux(灯罩, 1M/1m with reflector)
照射角度 / Angle	120°	
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)	
场景光效模式 / Scene light mode	6种 / 6kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30cm	
电源转换器 / AC adapter	输入电压:AC100V-240V	
	输出电压:DC24V±3A	
散热 / Cooling way	热管散热+电子静音风扇 Heat pipe cooling +Electronic silent fan	
包装体积和重量 / Package size and weight	单灯:30.5x17.5x11.2cm/0.8Kg	标准版:34x26.5x13cm/1.3Kg
	套装:34x26.5x13cm/2.3Kg	

便携影视灯

Portable LED video light

阿卡系列

AR Series



白光可加减红/绿 (±G/M)

可提高被摄体或人体肤色质感;亦可适应不同光色的场景环境。

360°色相及其饱和度可任意调节

提供丰富色感的光线,带来多样性的创意表达,增强画面的视觉吸引力和艺术感染力。

RGB三色任意混搭出色

提供丰富而灵动的色彩,带来多样化的视觉效果和感官体验。

Magenta-green adjustment at daylite 5600K (±G / M)

Can improve the texture of the subject or human skin color; It can also adapt to scene environments with different light colors.

360° hue and saturation can be adjusted freely

Provide rich color light, bring diverse creative expressions, enhance the visual appeal and artistic appeal of the picture.

Any RGB red, green and blue blending colors you desire

Provide rich and dynamic colors, bringing diverse visual effects and sensory experiences.

标配/Includes:



灯架座
Holder



迷你口灯罩 SN-35
Mini reflector SN-35
含柔光布/with soft cloth



电源转换器PW-05
Power adapter
PW-05

产品参数/ Product parameters

型号 / Model	AR-1000C
货号 / Item No.	640327
功率 / Power	100W
灯体输入电压 / Input voltage	DC24V或USB-C INPUT 20V±5A
显色指数 / CRI	≥96
电视照明一致性指数 / TLCI	≥96
色温 / Color temperature	(2700K-6500K)±200K
GM值调节范围 / GM value adjustment range	-1.0~1.0
光通量 / Luminous flux	12000LM
光照度 / Illuminance	
照射角度 / Angle	120°
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)
场景光效模式 / Scene light mode	18种 / 18 kinds
内置接收 / Built-in receiver	APP
遥控距离 / Remote distance	≤30cm
电源转换器 / AC adapter	输入电压:AC100V-240V
	输出电压:DC24V±6A
散热 / Cooling way	热管散热+电子静音风扇 Heat pipe cooling +Electronic silent fan
包装体积和重量 / Package size and weight	单灯:30.5x17.5x11.2cm/0.8Kg
	标准版:34x26.5x13cm/1.3Kg 套装:34x26.5x13cm/2.3Kg

标配/Includes:



灯架座
Holder



迷你口灯罩 SN-35
Mini reflector SN-35
含柔光布/with soft cloth




电源转换器PW-11
Power adapter
PW-11

产品参数/ Product parameters

型号 / Model	AR-600C
货号 / Item No.	640312
功率 / Power	50W
灯体输入电压 / Input voltage	DC24V或USB-C INPUT 20V±5A
显色指数 / CRI	≥96
电视照明一致性指数 / TLCI	≥96
色温 / Color temperature	(2700K-6500K)±200K
GM值调节范围 / GM value adjustment range	-1.0~1.0
光通量 / Luminous flux	4500LM
光照度 / Illuminance	5200Lux (灯罩, 1M/1m with reflector)
照射角度 / Angle	120°
功率调节 / Power adjustment	0%-100%(100级调节 / 100-Level adjustment)
场景光效模式 / Scene light mode	18种 / 18 kinds
内置接收 / Built-in receiver	APP
遥控距离 / Remote distance	≤30cm
电源转换器 / AC adapter	输入电压:AC100V-240V
	输出电压:DC24V±3A
散热 / Cooling way	热管散热+电子静音风扇 Heat pipe cooling +Electronic silent fan
包装体积和重量 / Package size and weight	单灯:30.5x17.5x11.2cm/0.8Kg
	标准版:34x26.5x13cm/1.3Kg 套装:34x26.5x13cm/2.3Kg

光效附件 Accessories

聚光筒 Projection Attachment



旋转设计 拒绝繁琐
Intuitive design



图形片旋转环可**180°**旋转
Maximum rotation angle 180°

调焦器




FD-110
68086




调焦器(含挡板)=1套
Focus adjuster (including baffle)=1 set
蜂巢罩φ170-3x3=1个
Grid 170-3x3=1 pc



SN-28
68094

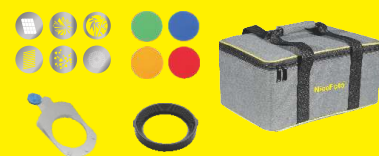

聚光筒=1个
Optical spot=1pc
图形片卡槽=1个
Pattern=1pc
图形片=6张
Slideshow=6pc
色片=4张
Filter paper=4 pc
色片夹=1个
Color chip holder=1pc
箱包=1个
Carry bag=1pc




SN-29A
68093



聚光筒(含色片夹)=1个
Optical spot (including color clip)=1pc
镜头=1个
Lens=1pc
图形片卡槽=1个
Graphics card slot=1pc
LED彩图=9张
LED color photos=9pc
图形片=16张
Slideshow=16pc
色片=5张
Filter paper=5pc



SN-29.Pro
68088



聚光筒=1个
Optical spot=1pc
85mm镜头=1个
85mm lens=1pc
图形片卡槽=1个
Pattern=1pc
图形片=12张
Slideshow=12pc
色片=6张
Filter paper=6 pc
镜头色片盖=1个
Color gel filter cover=1pc



SN-29.ProII
68090



聚光筒=1个
Optical spot=1pc
图形片卡槽=1个
Pattern=1pc
图形片=12张
Slideshow=6pc
色纸片夹=1个
Color gel filter cover=1pc





SN-29
68079



聚光筒=1个
Optical spot=1pc
永诺镜头=1个
Yongnuo lens= 1pc
图形片卡槽=1个
Pattern=1pc
LED彩图=9张
LED color photos=9pc
图形片=4张
Slideshow=4pc
色片=4张
Filter paper=4 pc

光效附件
Accessories

带网快装深口柔光箱
Quick set-up deep softbox(with grid)

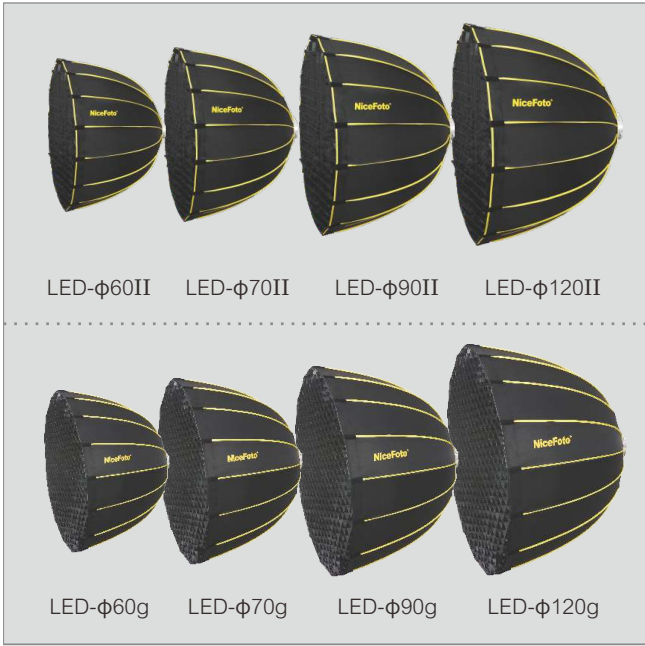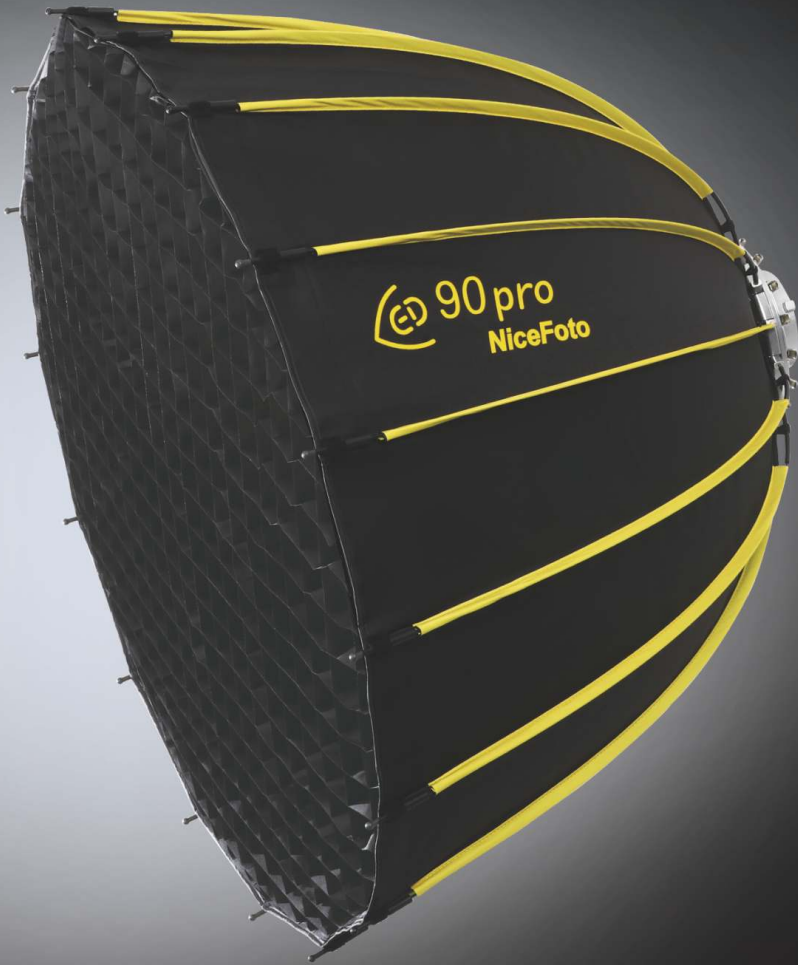


产品参数/ Product parameters		
卡盘/Chuck	LED.II合金卡盘 (带网) LED. II Alloy Chuck (With grid)	LED金属卡盘 (带网) LED metal chuck (With grid)
货号/型号 Item No./Model		
尺寸 / Size		
60cm	6120176 / LED-φ60II	6120129 / LED-φ60g
70cm	6120174 / LED-φ70II	6120117 / LED-φ70g
90cm	6120173 / LED-φ90II	6120115 / LED-φ90g
120cm	6120175 / LED-φ120II	6120116 / LED-φ120g
150cm	/	/


产品参数/ Product parameters	
卡盘/Chuck	LED.Pro金属卡盘 (带网) LED.Pro metal chuck (With grid)
货号/型号 Item No./Model	
尺寸 / Size	
60cm	/
70cm	6120172 / LED-φ70.Pro
90cm	6120161 / LED-φ90.Pro
120cm	/
150cm	6120185 / LED-φ150.Pro



光效附件
Accessories

八角形柔光箱
Octagonal Softbox

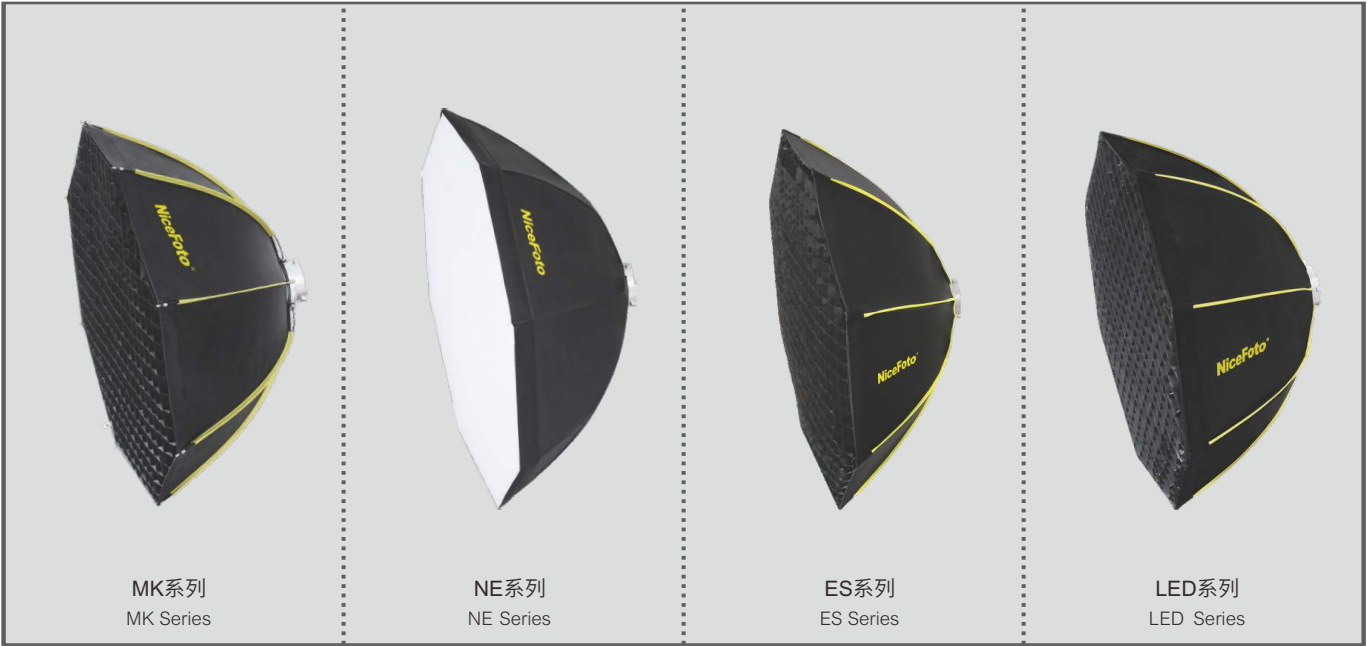

产品参数/ Product parameters				
卡盘/Chuck	合金卡盘(网格另购) Alloy Chuck (Grid Sold separately)	NE插杆式卡盘柔光箱(不带网) Ne plug-in chuck softbox (without mesh)	ES系列提拉式卡盘(网格另购) Pull-up chuck(Grid Sold separately)	LED按键式卡盘(带网) push-button chuck(With grid)
货号/型号 Item No./Model				
尺寸 / Size				
φ60cm	6120910 / MK-φ60(八角)	/	/	/
φ80cm	/	612075 / NE08-φ80cm	/	/
φ90cm	6120911 / MK-φ90(八角)	/	/	6120168 / LED-φ90g(八角)
φ95cm	/	612076 / NE08-φ95cm	/	/
φ100cm	/	/	6120145 / ES-φ100八角	/
φ140cm	/	612077 / NE08-φ140cm	/	/


光效附件
Accessories

方形柔光箱
Rectangular Softbox




产品参数/ Product parameters			
卡盘/Chuck	NE插杆式卡盘柔光箱 (不带网) Ne plug-in chuck softbox (without mesh)	ES系列提拉式卡盘(网格另购) Pull-up chuck(Grid Sold separately)	LED按键式卡盘(带网) push-button chuck(With grid)
货号/型号 Item No./Model			
尺寸 / Size			
60x60cm	612071 / NE08-60x60cm	/	6120171 / LED-φ660g
60x90cm	612072 / NE08-60x90cm	6120148 / ES-690	6120165 / LED-φ690g
70x100cm	612073 / NE08-70x100cm	6120144 / ES-710	6120166 / LED-φ710g
80x120cm	612074 / NE08-80x120cm	/	/
120x30cm	/	6120150 / ES-1230	/
140x30cm	/	/	6120167 / LED-φ1430g

灯笼柔光箱
Globe softbox

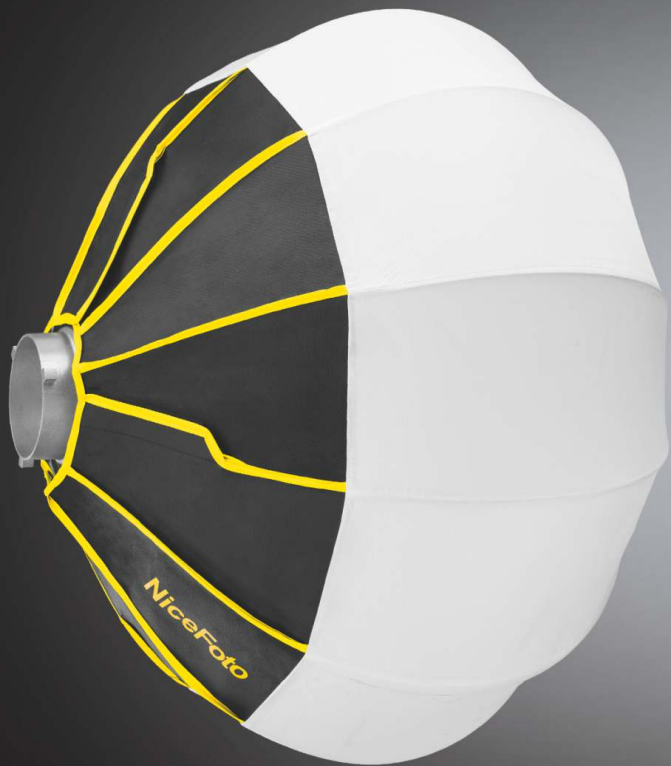

灯笼柔光箱系列
Lantern Softbox Series

产品参数/ Product parameters		
卡盘/Chuck	 	
货号/型号 Item No./Model		
尺寸 / Size		
φ50cm	6120178/L-φ50III	612104/L-φ50cm
φ65cm	6120170/L-φ65III	612105/L-φ65cm
φ80cm	6120179/L-φ80III	612106/L-φ80cm

产品参数/ Product parameters	
卡盘/Chuck	
货号/型号 Item No./Model	
尺寸 / Size	
φ50cm	/
φ65cm	68091 / L-φ65II
φ80cm	/



灯笼柔光箱系列(带遮扉)
Lantern Softbo xseries(With skirts)

光效附件
Accessories

Mini保荣卡口附件
Mini bowens mount Accessories



迷你保荣卡口柔光箱(带网快拆)

Mini bowens mount softbox(with grid,easily folded)

mini-Ø22g / mini-Ø30g / mini-Ø40g / mini-Ø50g / mini-Ø60g

迷你保荣卡口柔光箱(灯笼)

Mini bowens mount softbox(Globe)

mini-φ30cm

产品参数/ Product parameters		
卡盘 Chuck		
货号/型号 Item No./Model	迷你保荣卡口 Mini bowens mount	
尺寸 / Size		
φ22cm	6120181 / mini-Ø22g	
φ30cm	6120182 / mini-Ø30g	6120188 / mini-φ30cm
φ40cm	6120183 / mini-Ø40g	
φ50cm	6120184 / mini-Ø50g	
φ60cm	6120185 / mini-Ø60g	

产品参数/ Product parameters

蜂巢罩
Barndoor
filter kits



68098 SN-33

色片 = 4块
透明片=1块
蜂巢网=1个
四叶挡板=1个

Color filters=4 pcs
transparent diffuser=1pc
grid=1pc
4-leaf barndoor=1pc

mini保荣转换座
Mini Baorong Conversion Seat



68100 / mini-36B

电池手柄/Battery grip



电池手柄/Battery grip
619026 P77
(14.8V 5200mAh /77WH)

CtoC线 30cm=1条
DC转DC线25cm=1条
CtoC wire 30cm=1pc
DC to DC cable 25cm=1pc

箱包/Bag



箱包(套装版) / Carry bag

支撑附件

Support accessories



LS-20
611004



LS-70
611005



LS-200A
611091



LS-280B
611003



LS-13
611071



LS-16
611081



LS-280AT
611120



LS-280S
611085



LS-3000S
(含脚轮 / With wheels)
611086



Y660 II
611084



Y660 III
611114



LS-M16
(含脚轮 / with wheels)
611088

产品参数/ Product parameters							
地灯架		灯架					
型号/Model	LS-20	LS-70	LS-200A	LS-280B	LS-280AT	LS-280S	LS-3000S
货号/Item No.	611004	611005	611091	611003	611120	611085	611086
	220mm	700mm	2000mm	2600mm	2800mm	2600mm	3000mm
	220mm	500mm	850mm	1100mm	1130mm	1100mm	1050mm
	260mm	480mm	710mm	960mm	980mm	960mm	1050mm
	0.7kg	0.9kg	1kg	2.7kg	2.1kg	2.8kg	7.9kg
节数 / Section	/	2	3	3	3	3	3
	/	Φ19 / Φ25	Φ19 / Φ22 / Φ25	Φ25 / Φ30 / Φ35	Φ25 / Φ30 / Φ35	Φ25, Φ30, Φ35	Φ25 / Φ30 / Φ35
脚管 / Leg	/	/	16	Φ22	Φ22	Φ22	20×20mm
	3kg	3kg	4.0kg	5.0kg	6kg	5kg	10kg
	/	/	780mm	1160mm	1110mm	680mm	1100mm
材质 / Material	铝材/Aluminum	铝材 / Aluminum	铝材 / Steel	钢管 / Steel	铝材 / Aluminum	不锈钢/stainless steel	钢管 / Steel
灯架头 / Holder							

产品参数/ Product parameters					
	横臂灯架	二合一灯架	C型架		横臂灯架
型号/Model	LS-13	LS-16	Y660II	Y660III	LS-M16
货号/Item No.	611071	611081	611084	611114	611088
	/	4000mm	3300mm	3200mm	2260mm
	/	1230mm	1490mm	1800mm	1150mm
	830mm	/	/	/	1500mm
	2.1kg	3.9kg	8.08kg	/	22.4kg
节数 / Section	2	4	/	12.3kg	5
	/	Φ30, Φ35	Φ25 / Φ30 / Φ35	/	Φ25/Φ30/Φ35/Φ40/Φ45
脚管 / Leg	/	Φ22	/	Φ25 / Φ30 / Φ35	25×25mm
横臂 / Cross bar	Φ25 / Φ30	Φ19 / Φ22	/	/	/
	10kg	10kg	20kg	20kg	5kg
	/	/	/	/	1340mm
	1580mm	2110mm	1070mm	2250mm	2600mm
	830mm	1150mm	/	/	2200mm
材质 / Material	钢管 / Steel	钢管 / Steel	不锈钢/stainless steel	不锈钢/stainless steel	不锈钢/stainless steel
灯架头 / Holder					