

CCT	(2700K-6500K)±200K
Luminous flux	10000LM
Power adjustment	0%-100%
Scene light mode	6Kinds
Built-in receiver	APP
Remote distance	≤30m
Cooling way	Natural cooling
Dimmer box	Input voltage: AC100V-240V
	Output voltage: DC 72V ±1.5A
Folding Length	72cm
Umbrella depth	35cm
Umbrella cover diameter	Ø80cm
Package size / weight	15x14x77cm/1.8kg

Maintenance :

1. Don't look into the LED video light with eyes.
2. When replace accessories and maintain the equipment, make sure to disconnect the power supply.
3. Please store it in a dry and ventilated place at room temperature after using.
4. When it fails or gets wet, it can be used after repairing by professional person.
5. The product is one year warranty.

Precautions :

1. There is high-voltage electricity inside the machine, and non professionals are strictly prohibited from disassembling it.
2. It is strictly prohibited to touch or cover heating parts such as lamps to avoid burns and electric shock.
3. Don't look directly at the light source or irradiate the skin for a long time.

Common faults and Solution:

Fault	Solution
No electricity	Check power cable is damaged or not, the plug is inserted well or not.
	Power switch is damaged or not(repaired by professional person)
	Check if the connector is properly connected
The adjustment button is not responsive	Damage to the adjustment button (please have a professional overhaul)

Shenzhen Nice Photographic Equipment Co.,Ltd

Add: No. 349, Pinglong east road, Pinghu street,
Longgang district, Shenzhen, China.518111

Tel : +86-755-84709123
Fax: +86-755-28753923
URL: www.sznicefoto.com
E-mail: Sales@nicefoto.cn



Website

NO.2510

NiceFoto® 耐思

伞罩灯(八角形)

BS80-1000A

使用说明



感谢您选购耐思伞罩灯八角形 BS80-1000A


伞罩灯八角形BS80-1000A, 快拆设计, 安装简单, 收纳方便, 亮度可调, 八角形设计, 光线更加均匀, 阴影过渡更自然, 无论是带货直播, 视频创作还是产品拍摄, 它都能为您提供专业的光线效果, 助您轻松打造理想的拍摄环境。

温馨提示: 为了您能更快的掌握操作本产品, 请您在操作之前仔细阅读本产品使用说明。

本说明书的技术参数规格是指在特定的工作环境和常温(23°C)下, 所测出计算数据。

本说明书的解释权归本公司所有, 本公司保留对使用说明书所描述的产品进行改进而不预先通知的权利; 本资料经过认真核对以求准确, 如有任何印刷翻译中可产生之误差, 本公司不承担因此产生的后果, 因产品不断升级, 不同批次产品可能有细微变化请以最新实物为准, 敬请谅解。

产品结构及功能按键说明：

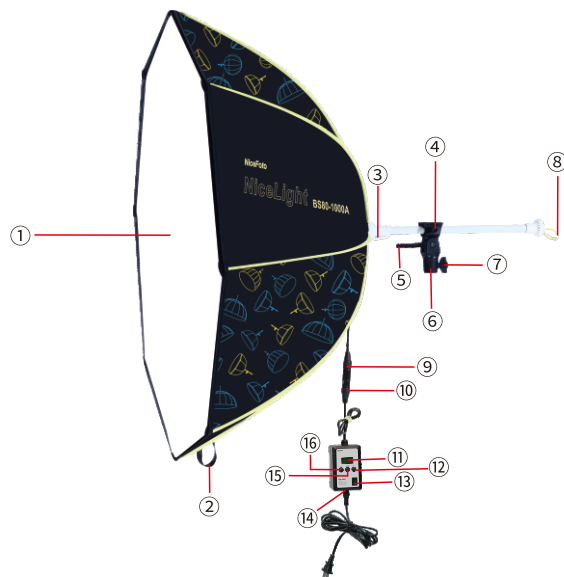

①	柔光布	②	扎带
③	开合按钮	④	止伞螺丝
⑤	俯仰调节把手	⑥	灯架座
⑦	灯架锁紧螺丝	⑧	挂绳
⑨	三芯连接器(公插)	⑩	三芯连接器(母插)
⑪	显示屏	⑫	递增按键
⑬	电源开关	⑭	AC电源输入接口
⑮	模式按键	⑯	递减按键

产品安装与使用方法：

一、灯体安装

撑开灯体：

打开扎带②，握住伞柄，向前推动开合按钮③，推到伞骨与伞柄连接的卡扣处，听到‘咔嚓’一声，表示灯体已经撑开。

收纳灯体：

握住伞柄，先向前推动灯体，后按下开合按钮③，同时缓慢向后拉动伞柄，直到伞骨完全收拢，扎好扎带②，完成收拢。

注意：撑开和收拢灯体时，请勿用力过猛，以免损坏伞骨或灯体。

灯体俯仰调节：

拧松俯仰调节把手⑤，将灯体调整到合适的角度，并把把手⑤重新拧紧，再把灯架锁紧螺丝⑦拧松，放入到灯架后，拧紧灯架锁紧螺丝⑦，通过拧松止伞螺丝④可以调节伞柄前后距离。

悬挂使用：

可以通过挂绳⑧，悬挂或吊挂使用灯光。

Hanging usage:

Lights can be hung or suspended by a lanyard⑧.

2.Lamp body wire connection



Figure 2




Figure 3




Figure 4

Installation: Connect the 3-pin connector ⑩ (female plug) of the power dimmer box with the 3-pin connector ⑨ (male plug) of the lamp body, as shown in (Figure 2. Figure 3)Connect the male and female plugs and install it as shown in Figure 4. After the power socket is powered on, turn the switch button to the ON state, the light turns on, and turn the switch button to the OFF state, the light turns off.

Disassembly: When removing the connector, press the white button of the 3-pin connector ⑩ (female plug) to remove and complete the disassembly. Do not pull it out forcefully.

Adjustment

1.Power switch :

Insert the power cord into the AC power input interface ⑭, turn on the power switch ⑬, and the display ⑪ lights up;

2.Power setting:

Press the decreasing button ⑮ or the increasing button ⑫ to adjust the power ($\pm 1\%$).

3.CCT mode

Lightly press the mode button to select the color temperature, then lightly press the decreasing button⑯ or Increasing button⑫ to adjust the corresponding value of the color temperature. Color temperature adjustment range: 2700K-6500K.

4. Scene light effect settings:

After downloading the app, you can make adjustments within the app.

5. Bluetooth reset:

Lightly press the mode button to enter the BT RESET page, lightly press the decreasing button ⑯ to select the RESET option, then press the Increasing button ⑫, display OK to indicate successful Bluetooth reset, and the Bluetooth indicator light remains on.

Package list:



Umbrella light=1PC
(Include stand holder)



Dimmer box=1PC
(BS-1000A)



Diffuser=1PC



Power cable=1pc
(3m)




Carry bag=1PC

Specification:

Model	BS80-1000A
Item No.	640421
Input voltage	DC 72V $\pm$ 1.5A
CRI	≥ 96
TLCI	≥ 96

Structure & function:

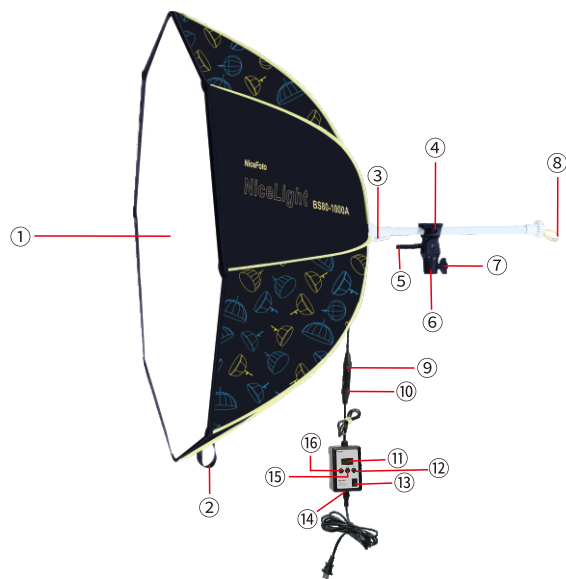

①	Diffuser	②	Ribbon
③	Opening and folding button	④	Umbrella locking screw
⑤	Pitch adjustment handle	⑥	Lamp holder
⑦	Locking screw	⑧	Lanyard
⑨	3-pin connector(male)	⑩	3-pin connector(female)
⑪	Display	⑫	Increasing button
⑬	Power switch cable	⑭	AC power input interface
⑮	Mode button	⑯	Decreasing button

Installation and Usage:

1. Installation of lamp body

Open the lamp body:

Open ribbon ②, hold the umbrella handle, push the opening and folding button ③ forward, and push it to the buckle where the umbrella ribs and handle are connected. If you hear a 'click' sound, it indicates that the light body already stretched out.

Fold lamp body:

Grasp the umbrella handle, first push the lamp body forward, then press the opening and folding button ③, while slowly pulling the umbrella handle backward until the umbrella ribs are completely retracted, and tie the ribbon ②, Complete the gathering.

Note: When opening and folding the lamp body, do not apply too much force to avoid damaging the umbrella ribs or lamp body.

Pitch adjustment:

Loosen the Pitch adjustment handle ⑤, adjust the lamp body to the appropriate angle, and tighten the handle ⑤ again. Then loosen the locking screw ⑦ of the lamp holder and install on the light stand, tighten the lamp holder locking screw ⑦, and adjust the distance between the umbrella handle of the front and rear by loosening the umbrella locking screw ④.

二、灯体线材连接



图2




图3



图4

安装:将电源调光盒的三芯连接器⑩(母插)与灯体的三芯连接器⑨(公插)对接装好,如(图2、图3、将公插和母插按箭头位置对接,装好如图4所示。电源插座通电后,将开关按键打到ON状态,灯光开启,将开关按键打到OFF状态,灯光关闭。

拆卸:取出连接器时,轻按三芯连接器⑩(母插)白色按钮即可去取出完成拆卸,请勿硬拔。

调节:

1. 电源开关:

电源线插入AC电源输入接口⑭,打开电源开关⑬,显示屏⑪点亮;

2. 功率设置:

轻按递减按键⑯或递增按键⑫,可调节功率(±1%)。

3. 冷暖光模式

轻按模式按键,选中色温,轻按递减按键⑯或递增按键⑫,可调节色温相应的值。

色温调节范围: 2700K-6500K。

4. 场景光效模式

下载APP之后,可在APP内调节。

5. 蓝牙重置:

轻按模式按键⑯,进入BT RESET页面,轻按递减按键⑯,选择RESET选项,再按递增按键⑫,显示OK代表蓝牙重置成功,蓝牙指示灯常亮。

出厂配置清单:



灯体=1台
(含灯架座)



调光盒=1个
(BS-100A)



柔光布=1块



8字尾电源线=1条
(3m)



收纳袋=1个

产品详细参数:

型号	BS80-1000A
货号	640421
灯体输入电压	DC 72V ± 1.5A
显色指数	≥96
电视照明一致性指数	≥96
色温	(2700K-6500K) ± 200K

光通量	10000LM
功率调节	0%-100%
场景光模式	6种
内置接收	APP
遥控距离	≤30m
散热	灯体:自然散热
电源调光盒	AC输入电压:AC100V-240V
	DC输出电压:DC 72V= 1.5A
收拢长度	72cm
伞罩深度	35cm
伞罩直径	Ø80cm
包装体积/重量	15x14x77cm/1.8kg

维护与保养:

1. 不能把影视灯正对眼睛使用。
2. 在更换附件和保养本机时, 务必先断开电源。
3. 使用完毕后, 请存放在常温、通风、干燥的地方。
4. 产品发生故障或受潮后, 需经专业人员检修后, 方可继续使用。
5. 本机售后免费保修1年。

注意事项:

1. 机内有高压电, 严禁非专业人士进行拆卸。
2. 严禁触摸或覆盖灯头等发热部位, 以免灼伤、触电。
3. 请勿长时间直视光源或长时间照射皮肤。

常见故障及处理方法:

故障	处理方法
不通电	检查电源线是否损坏, 插头是否插好
	电源开关是否损坏(请专业人员维修)
	检查连接器是否连接好
调节按键无反应	调节按键损坏(请专业人员检修)

深圳市耐思摄影器材有限公司

地 址: 深圳市龙岗区平湖街道平龙东路349号

电 话: 0755-28753927

传 真: 0755-28753923

网 址: www.nicefoto.cn

E-mail: nice@nicefoto.cn



官网二维码



微信公众号

NiceFoto

Umbrella light-octa BS80-1000A User Manual



Thanks so much for choosing NiceFoto umbrella light-octa BS80-1000A

Umbrella Light - octa BS80-1000A, comes with a power supply, quick release design, easy installation, fold convenient, uniform light, natural shadow transition, whether it's live streaming, video creation or product shooting, it can provide you with professional lighting effects, helping you easily create the ideal shooting environment.

Warm tips: In order to master the operation of this product more quickly, please read the instructions carefully before operation.

The technical parameters and specifications of this manual refer to the calculated data measured under a specific working environment and normal temperature (23°C).

The right to interpret this manual belongs to our company. Our company reserves the right to improve the products described in the manual without prior notice; this information has been carefully checked for accuracy. If there are any errors in the printing and translation, our company will not bear the consequences. Due to the continuous upgrading of products, there may be slight changes in different batches of products.