


深圳市耐思摄影器材有限公司 Shenzhen Nice Photographic Equipment Co.,Ltd

地址：深圳市龙岗区平湖街道 平龙东路349号
电话：0755-28753927
网址：www.NiceFoto.cn
E-mail: marketing@nicefoto.cn

Add : No.349, Pinglong east road, Pinghu street.
Longgang district, Shenzhen, China.518111
Tel: +86-755-84709123 /URL : www.szNiceFoto.com
E-mail: Sales@nicefoto.cn / marketing@nicefoto.cn




耐思官网(中文版)
NiceFoto website (CN)



耐思官网(英文版)
NiceFoto website (EN)



微信公众号
Wechat



Instagram账号
NiceFotoGlobal

* 本公司产品不断升级、更新，技术参数功能等仅供参考；如有变更恕不另行通知，图片与实物有细微差别，均以实物为准！
* 本画册上所有内容均经过认真核对，如有任何印刷错漏或内容上的误解，本公司保留最终解释权。
Warmtips: In order to grasp the operation of this product quickly, please read the instruction manual before operating;
As the product is updating all the time, so different batches of products will have some changes,
please all in kind of prevail, thanks so much for your kind understanding.

NiceFoto® 耐思


www.SZNiceFoto.com
www.NiceFoto.cn

电影直播灯光器材

Video & Live Lighting Equipment



NiceLight

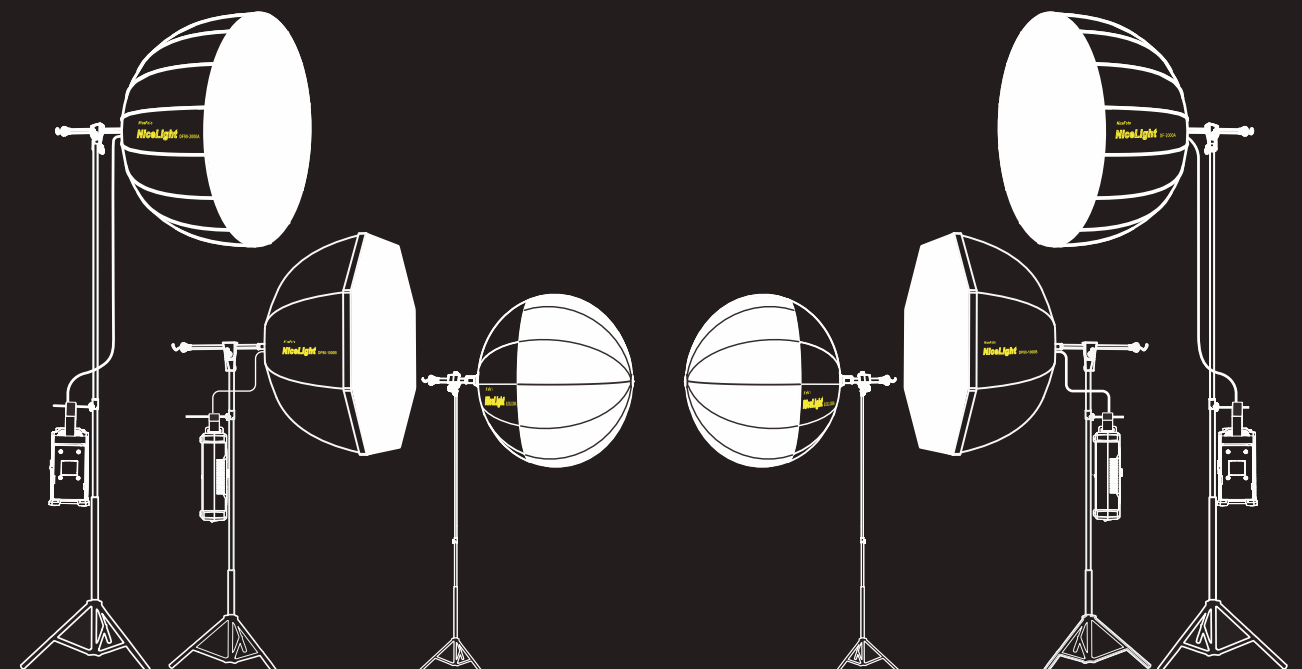

2026.1

伞罩灯/Umbrella Light

NiceFoto 耐思

伞罩灯/Umbrella Light

深圳市耐思摄影器材有限公司

2026.1

公司简介

Company profile



深圳市耐思摄影器材有限公司，二十年专注于电影影视器材研发与设计、制造、销售。拥有专业的技术队伍，先进的测试设备，完善的质量管理体系，以“创新影视器材产品，服务影视行业”为己任，经过不断的技术更新与发展，已成为领衔行业的知名品牌。

我们专注研发：电影光源产品、直播光源产品、摄影光源产品、手机影视光源产品、稳定器及各种布光道具、广告拍摄附件等系列产品，耐思产品均通过了CE、RoHS、PSE、FCC认证。

With more than twenty years production experience, advanced testing machines and the excellent management system. NiceFoto becomes a professional photographic and videographic manufacturing enterprise engaged in production, design, research and sales. After continuous efforts, our products are well-know enterprise in this area all over the world.

We focus on research and development following items: LED video & live light ,photo light, mobile phone light, stabilizer and various lighting props, advertising shooting accessories and so on. Most of the products are Passed CE, RoHS, FCC, PES certificates, and exported to Europe and USA all over the world.



车间生产
Production line



产品设备
Product equipment



专业设备
Professional equipment

经得起每一次的考验
华丽过后，依然自我
强劲、执着、携手共铸辉煌明天

We are strong enough to overcome each difficulty.
Always being ourselves, no matter what happens.
Being powerful and persistent, let's join in hands to build a bright future.

目录/Contents

一、伞罩灯深抛系列 / Umbrella Light-Parabolic series

D L (双色温、AC/DC电源调光盒) / DL(Bi-color,AC/DC Power dimming box)	P01-02
D F (双色温、AC电源调光盒) / DF(Bi-color,AC Power dimming box)	P03-04
D L (全彩、AC/DC电源调光盒) / D L(RGB,AC/DC Power dimming box)	P05-06
D F (全彩、AC电源调光盒) / DF(RGB,AC Power dimming box)	P07-08

二、伞罩灯灯笼系列 / Umbrella Light-Lantern series

D L (双色温、AC/DC电源调光盒) / DL(Bi-color,AC/DC Power dimming box)	P09-10
D F (双色温、AC电源调光盒) / DF(Bi-color,AC Power dimming box)	P11-12
D P (单色温、AC开关) / DP(Daylight,AC switch)	P13-14

三、伞罩灯八角形系列/Umbrella Light- Octa series

D P (单色温、AC开关) / DP(Daylight,AC switch)	P15-16
D S (单色温、AC调光) / DS(Daylight,AC Power dimming)	P17-18
D P-R (单色温、AC遥控) / DP(Daylight,AC remote control)	P19-20

四、伞罩灯套装 八角形系列/Umbrella light two-light kit Octagonal series

K T 套装 (单色温、AC开关) / KT kit(Daylight,AC switch)	P21-22
--	--------

五、伞罩灯方形系列 / Umbrella Light-Square series

D L (双色温、AC/DC电源调光盒) / DL(Bi-color,AC/DC Power dimming box)	P23-24
D F (双色温、AC电源调光盒) / DF(Bi-color,AC Power dimming box)	P25-26

六、折叠布灯 / Foldable Light

V B (双色温/全彩、AC/DC电源调光盒) / VB(Bi-color/RGB,AC/DC Power dimming box)	P27-30
F B (双色温/全彩、AC电源调光盒) /FB(Bi-color/RGB,AC Power dimming box)	P31-32

伞罩灯

Umbrella Light


深抛DL系列

Parabolic DL Series


双色温、AC/DC电源调光盒
Bi color, AC/DC Power control box



DL120-3000A | DL90-2000A | DL80-1000A | DL60-1000A

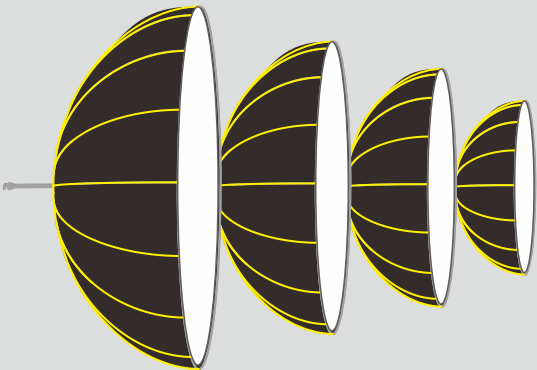

网格/Grid
(另购/Sold separately)



产品参数/ Product parameters

型号 / Model	DL120-3000A	DL90-2000A	DL80-1000A	DL60-1000A
货号 / Item No.	640344	640345	640346	640347
功率 / Power	300W	200W	100W	100W
灯体输入电压/ Input Voltage	DC54V-58V			
显色指数/ CRI	≥96			
电视一致性照明指数/ TLCI	≥96			
色温/ CCT	(2700K-6500K) ±200K			
光通量/ Luminous flux	30000LM	20000LM	10000LM	10000LM
功率调节 / Power adjustment	0% -100%			
场景光效模式 / Scene light mode	6种 / 6 kinds			
内置接收 / Built-in receiver	APP			
遥控距离 / Remote distance	≤30m			
散热/ Cooling way	灯体:自然散热/Lamp body: Natur alcooling			
	电源调光盒:静音风扇散热 / Power Dimming Box: Silent Fan Cooling			
电源调光盒/Power dimming box	输入电压:AC100V-240V或DC14.8Vx2 / Inputvoltage:AC100V-240VOr DC14.8Vx2			
	输出电压:DC54V-58V / Output voltage:DC54V-58V			
伞罩直径/Umbrella cover diameter	φ120	φ90	φ80	φ60
伞罩深度/Umbrella depth	66cm	53cm	38cm	33cm
收拢长度/Folding Length	106cm	92cm	76cm	62cm
包装体积/重量/Package size/weight	19.5x18.5x94cm/5.3Kg		19.5x19.5x78cm/4.4Kg	


伞罩灯

Umbrella Light


深抛DF系列

Parabolic DF Series


双色温、AC电源调光盒
Bi color, AC Power control box

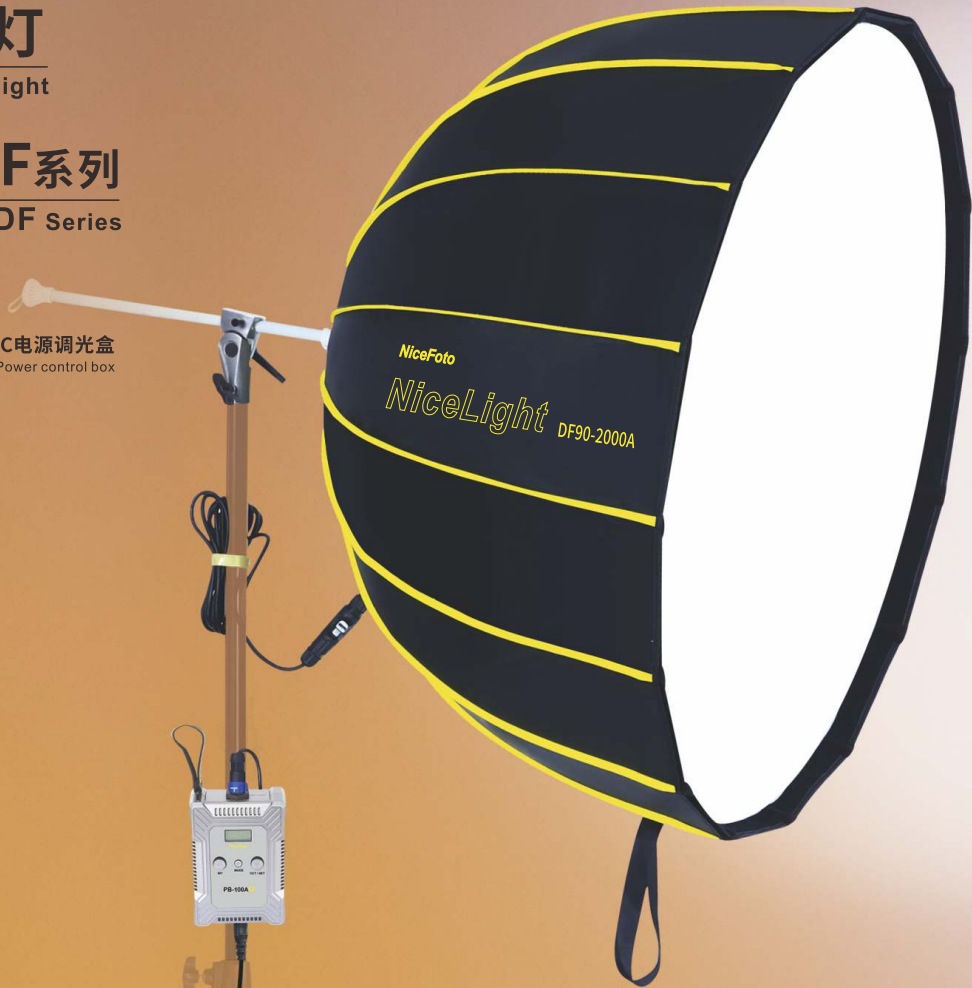

DF120-3000A | DF90-2000A | DF80-1000A | DF60-1000A

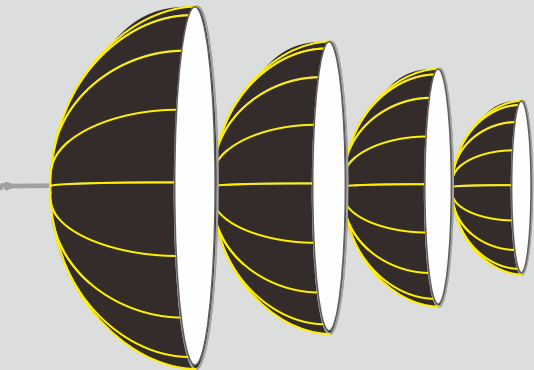

网格/Grid
(另购/Sold separately)



产品参数/ Product parameters


型号 / Model	DF120-3000A		DF90-2000A		DF80-1000A	DF60-1000A
货号 / Item No.	640349		640350		640351	640352
功率 / Power	300W		200W		100W	100W
灯体输入电压 / Input Voltage	DC160V-200V					
显色指数/ CRI	≥96					
电视一致性照明指数/ TLCI	≥96					
色温/ CCT	(2700K-6500K) ±200K					
光通量/Luminous flux	30000LM	20000LM		10000LM	10000LM	
功率调节 / Power adjustment	0% -100%					
场景光效模式 / Scene light mode	6种 / 6 kinds					
内置接收 / Built-in receiver	APP					
遥控距离 / Remote distance	≤30m					
散热/ Cooling way	灯体：自然散热 / Lamp body: Natural cooling					
	电源调光盒：静音风扇散热 / Power Dimming Box: Silent Fan Cooling					
	输入电压：AC180V-240V/ Input voltage: AC180V-240V					
电源调光盒/Power control box	输出电压：DC160V-200V/ Output voltage: DC160V-200V					
伞罩直径/Umbrella cover diameter	φ120	φ90		φ80	φ60	
伞罩深度/Umbrella depth	66cm	53cm		38cm	33cm	
收拢长度/Foldling Length	106cm	92cm		76cm	62cm	
包装体积/重量/Package size/weight			15x14x93.5cm/3.2Kg	15x14x77cm/2.8Kg		

伞罩灯

Umbrella Light

深抛DL系列

Parabolic DL Series

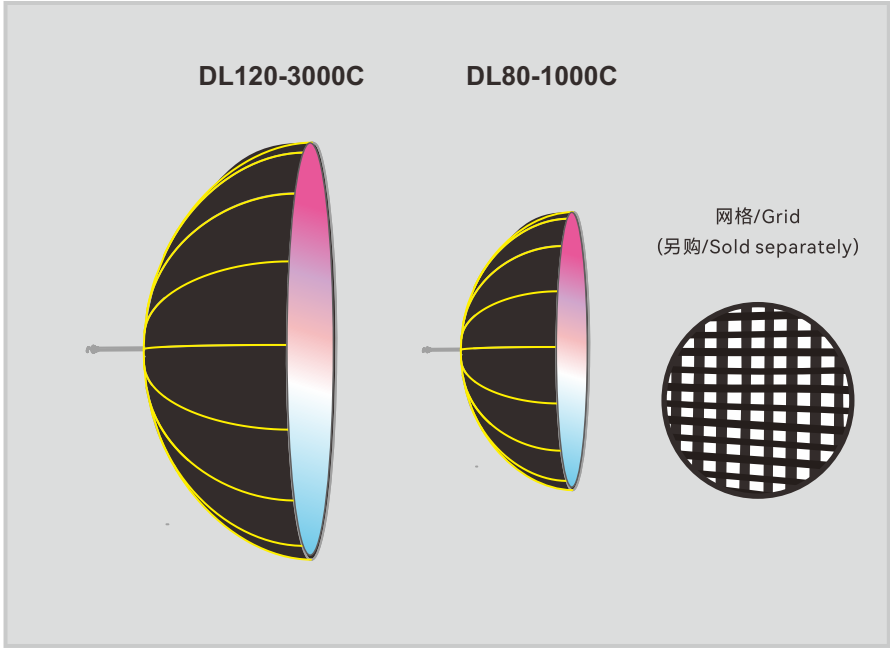

产品参数/Product parameters

型号 / Model	DL120-3000C	DL80-1000C
货号 / Item No.	640418	640365
功率 / Power	300W	100W
灯体输入电压 / Input Voltage	DC54V-58V	
显色指数 / CRI	≥96	
电视照明一致性指数 / TLCI	≥96	
色温 / CCT	(2700K-6500K)±200K	
色相 / Hue	H000-H360	
GM调节范围/GM value adjustment range	-1.0-1.0	
光通量 / Luminous flux	30000LM	10000LM
功率调节 / Power adjustment	0%-100%	
场景光模式 / FX effects	18种/18Kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30m	
散热 / Cooling way	灯体: 自然散热 / Light body:Natural cooling	
	电源调光盒: 静音风扇散热/Power dimming box:Silent fan cooling	
电源调光盒 / Power dimming box	输入电压:AC100V-240V或DC14.8Vx2/Input voltage:AC100V-240V Or DC14.8Vx2	
	输出电压: DC54V-58V/Output voltage: DC54V-58V	
伞罩直径 / Umbrella diameter	Φ120	Φ80
伞罩深度 / Umbrella depth	63cm	38cm
收拢长度 / Folded Length	94.5cm	76cm
包装体积 / 重量 Package size / weight	102.5x19.5x18.5cm 7.1Kg	19.5x19.5x78cm 5Kg

伞罩灯

Umbrella Light


深抛DF系列

Parabolic DF Series


全彩、AC电源调光盒
Full color, AC power control box



DF80-1000C

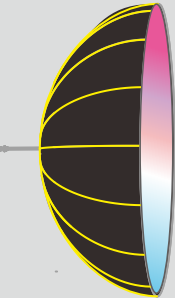

网格/Grid
(另购/Sold separately)



产品参数/Product parameters

型号 / Model	DF80-1000C
货号 / Item No.	640367
功率 / Power	100W
灯体输入电压 / Input Voltage	DC160V-200V
显色指数 / CRI	≥96
电视一致性照明指数 / TLCI	≥96
色温 / CCT	(2700K-6500K) ±200K
色相 / Hue	H000-H360
光通量 / Luminous flux	10000LM
功率调节 / Power adjustment	0% -100%
场景光模式 / Scene light mode	18种/18 kinds
内置接收/Built-in receiver	APP
遥控距离 / Remote distance	≤30m
散热 / Cooling way	灯体：自然散热 / Lamp body: Natural cooling 电源调光盒：静音风扇散热 / Power Dimming Box: Silent Fan Cooling
电源调光盒/Power dimming box	输入电压：AC180V-240V/ Input voltage: AC180V-240V 输出电压：DC160V-200V/ Output voltage: DC160V-200V
伞罩直径/Umbrella cover diameter	φ80
伞罩深度/Umbrella depth	38cm
收拢长度/Folding Length	76cm
包装体积/重量/Package size/weight	15x14x77cm/2.8Kg



伞罩灯

Umbrella Light


灯笼DL系列

Lantern DL Series

双色温、AC/DC电源调光盒
Bi color, AC/DC Power control box

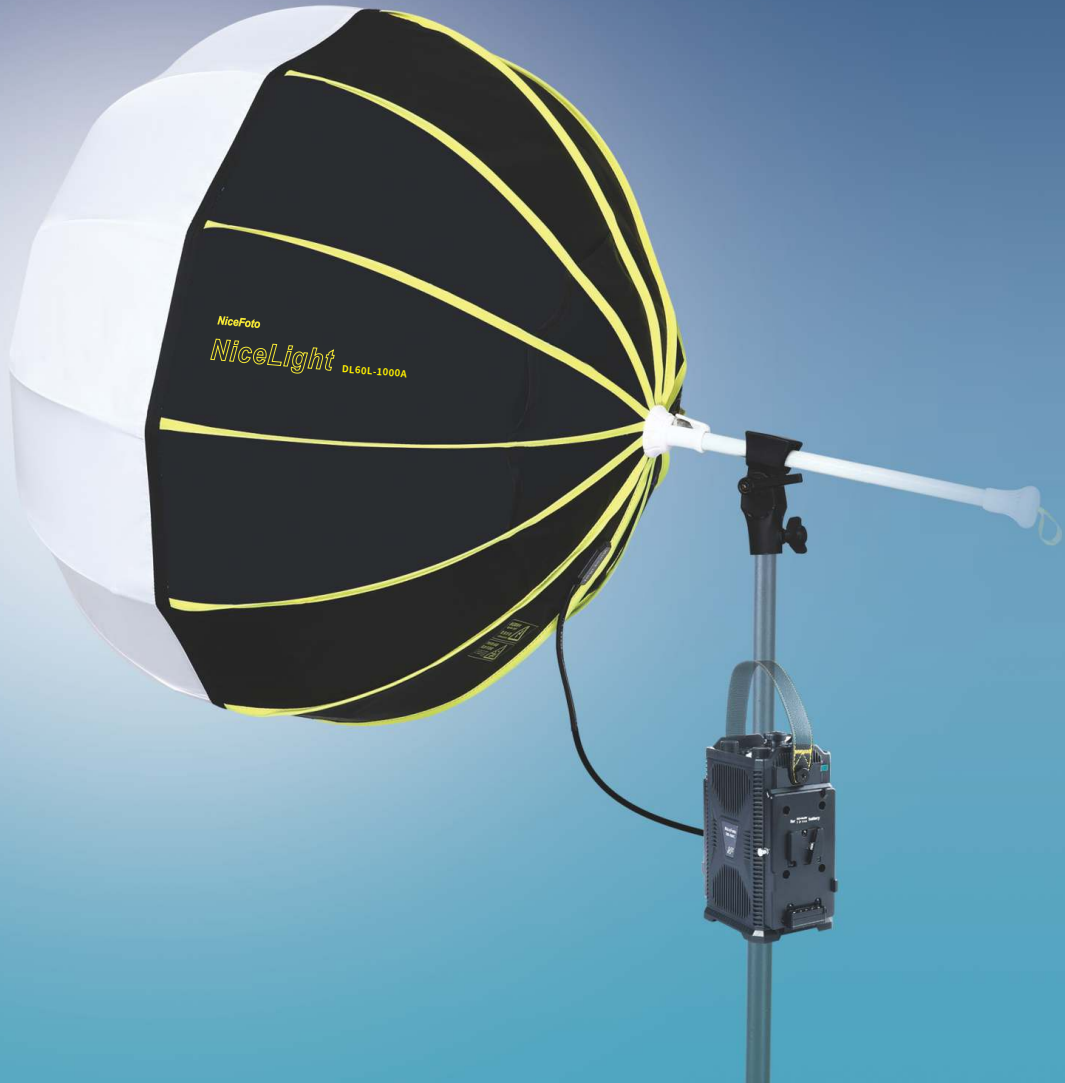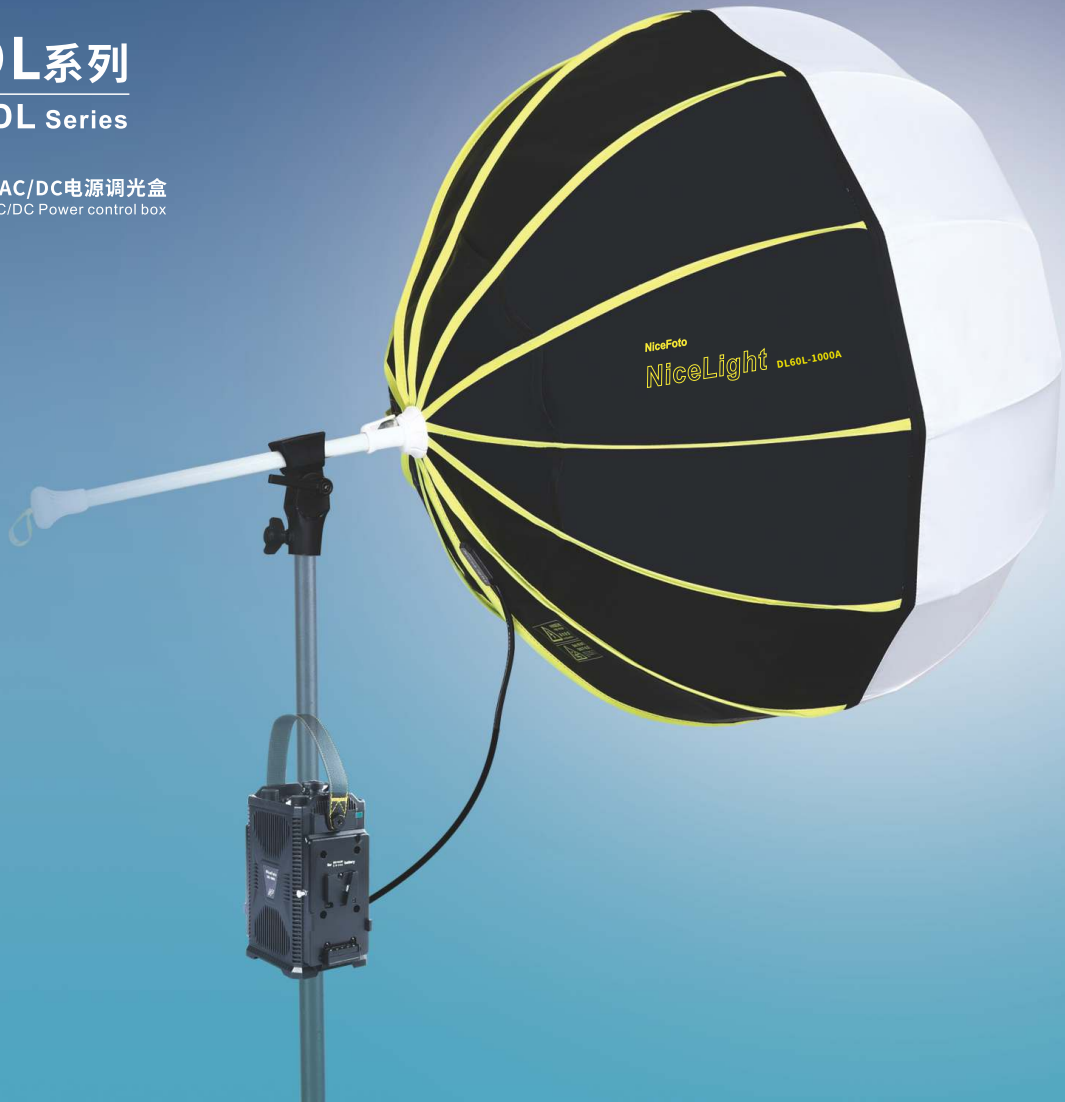

DL60L-1000A

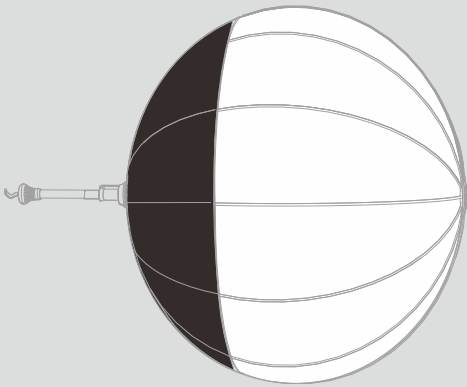



产品参数/Product parameters

型号 / Model	DL60L-1000A
货号 / Item No.	640368
功率 / Power	100W
灯体输入电压 / Input Voltage	DC54V-58V
显色指数 / CRI	≥96
电视一致性照明指数 / TLCI	≥96
色温 / CCT	(2700K-6500K) ±200K
光通量 / Luminous flux	10000LM
功率调节 / Power adjustment	0% -100%
场景光效模式 / Scene light mode	6种 / 6 kinds
内置接收 / Built-in receiver	APP
遥控距离 / Remote distance	≤30m
散热 / Cooling way	灯体：自然散热 / Lamp body: Natural cooling 电源调光盒：静音风扇散热 / Power Dimming Box: Silent Fan Cooling
电源调光盒 / Power control box	输入电压：AC100V-240V 或DC14.8Vx2 / Input voltage: AC100V-240V Or DC14.8Vx2 输出电压：DC54V-58V / Output voltage: DC54V-58V
伞罩直径 / Umbrella cover diameter	φ60
伞罩深度 / Umbrella depth	53cm
收拢长度 / Foldling Length	100cm
包装体积 / 重量 / Package size / weight	

伞罩灯
Umbrella Light

灯笼DF系列
Lantern DF Series

双色温、AC电源调光盒
Bi color, AC Power control box

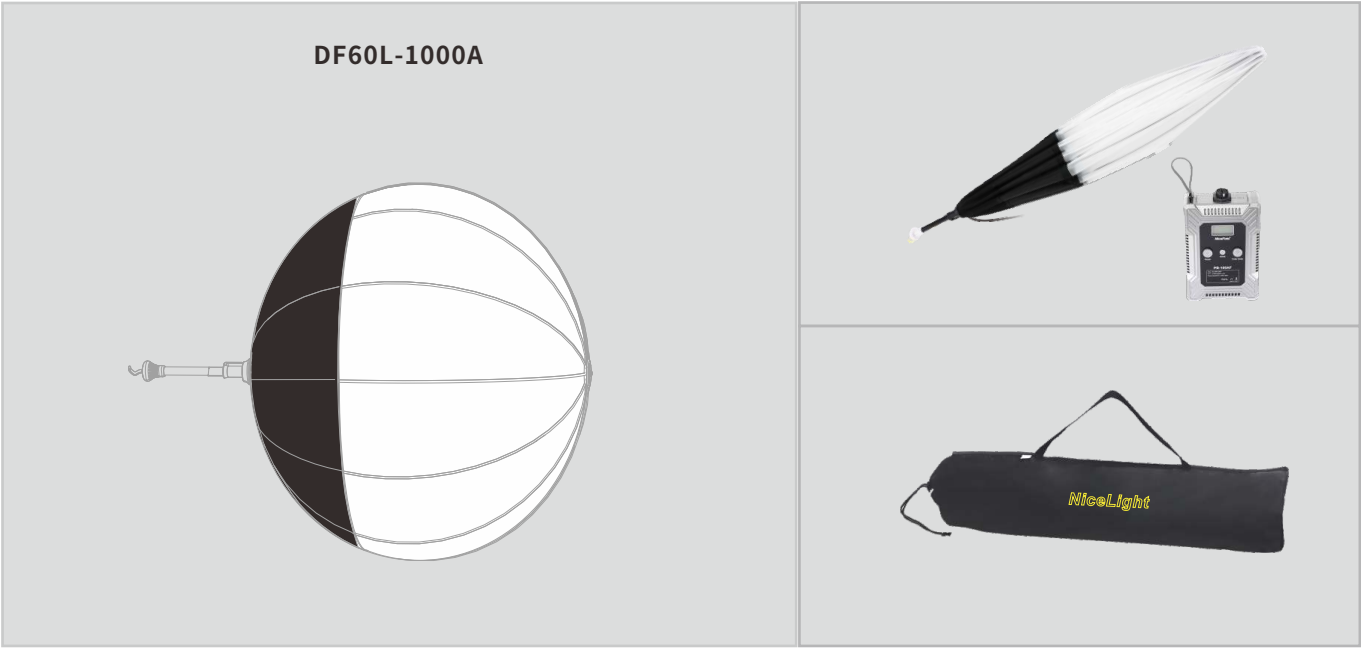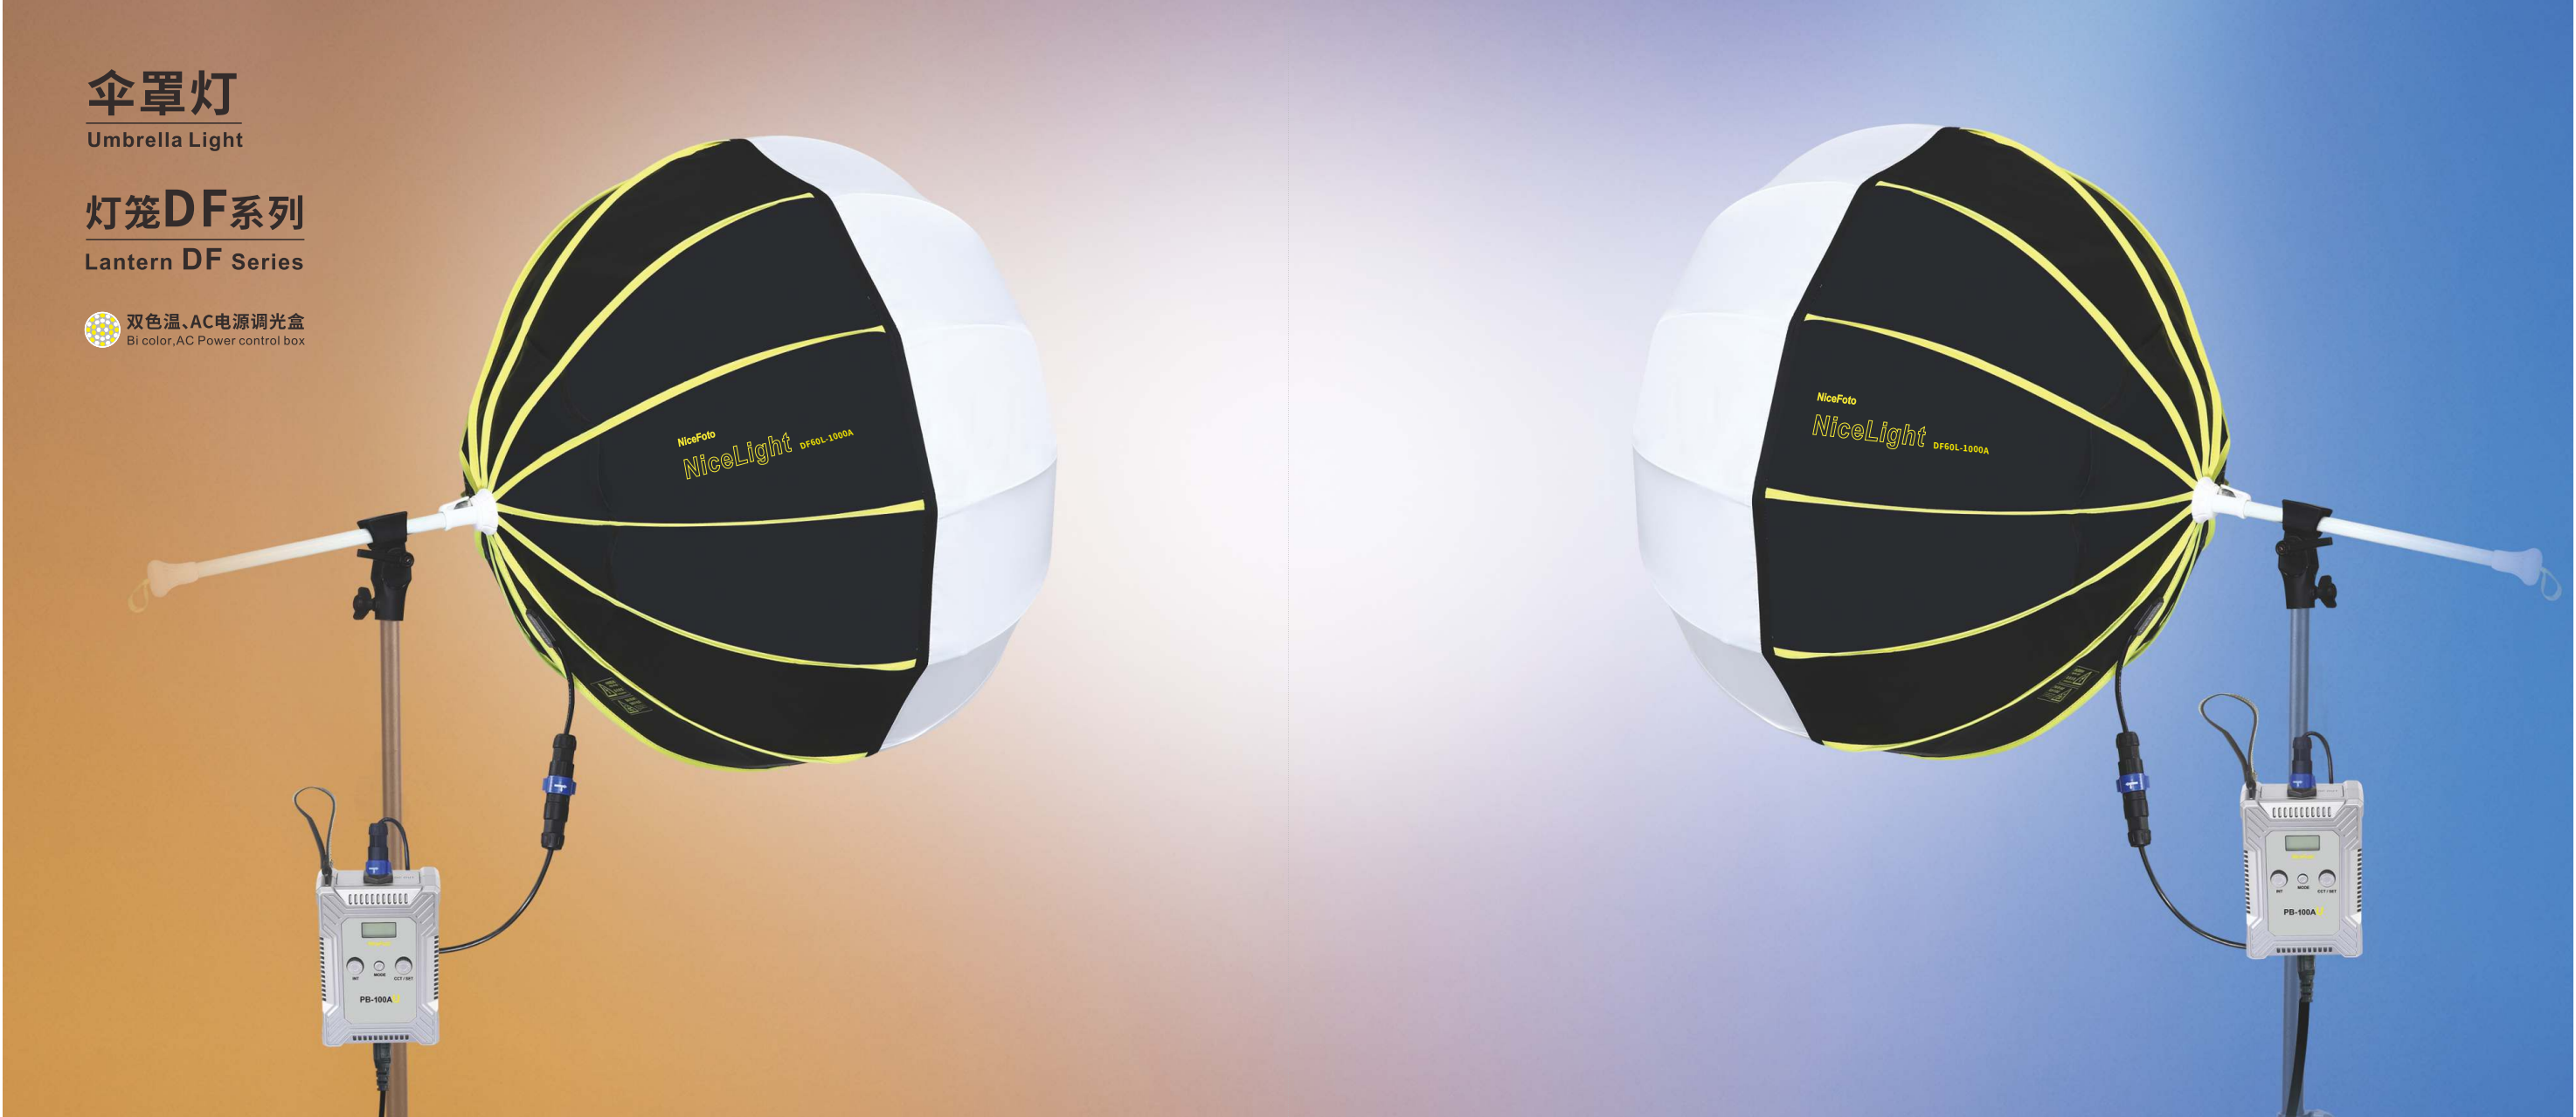

产品参数/Product parameters

型号 / Model	DF60L-1000A
货号 / Item No.	640370
功率 / Power	100W
灯体输入电压 / Input Voltage	DC160V-200V
显色指数 / CRI	≥96
电视一致性照明指数 / TLCI	≥96
色温 / CCT	(2700K-6500K) ±200K
光通量 / Luminous flux	10000LM
功率调节 / Power adjustment	0% -100%
场景光效模式 / Scene light mode	6种 / 6 kinds
内置接收 / Built-in receiver	APP
遥控距离 / Remote distance	≤30m
散热 / Cooling way	灯体：自然散热 / Lamp body: Natural cooling
	电源调光盒：静音风扇散热 / Power Dimming Box: Silent Fan Cooling
电源调光盒 / Power dimming box	输入电压：AC180V-240V / Input voltage: AC180V-240V
	输出电压：DC160V-200V / Output voltage: DC160V-200V
伞罩直径 / Umbrella cover diameter	φ60
伞罩深度 / Umbrella depth	53cm
收拢长度 / Foldling Length	100cm
包装体积 / 重量 / Package size / weight	



伞罩灯

Umbrella Light

灯笼DP系列

Lantern DP Series

单色温、AC开关
Daylite, AC power

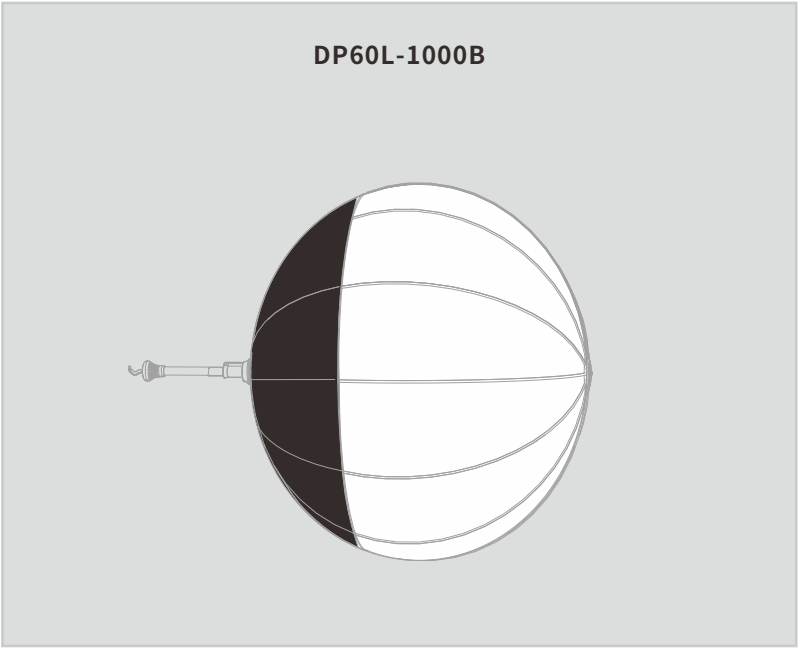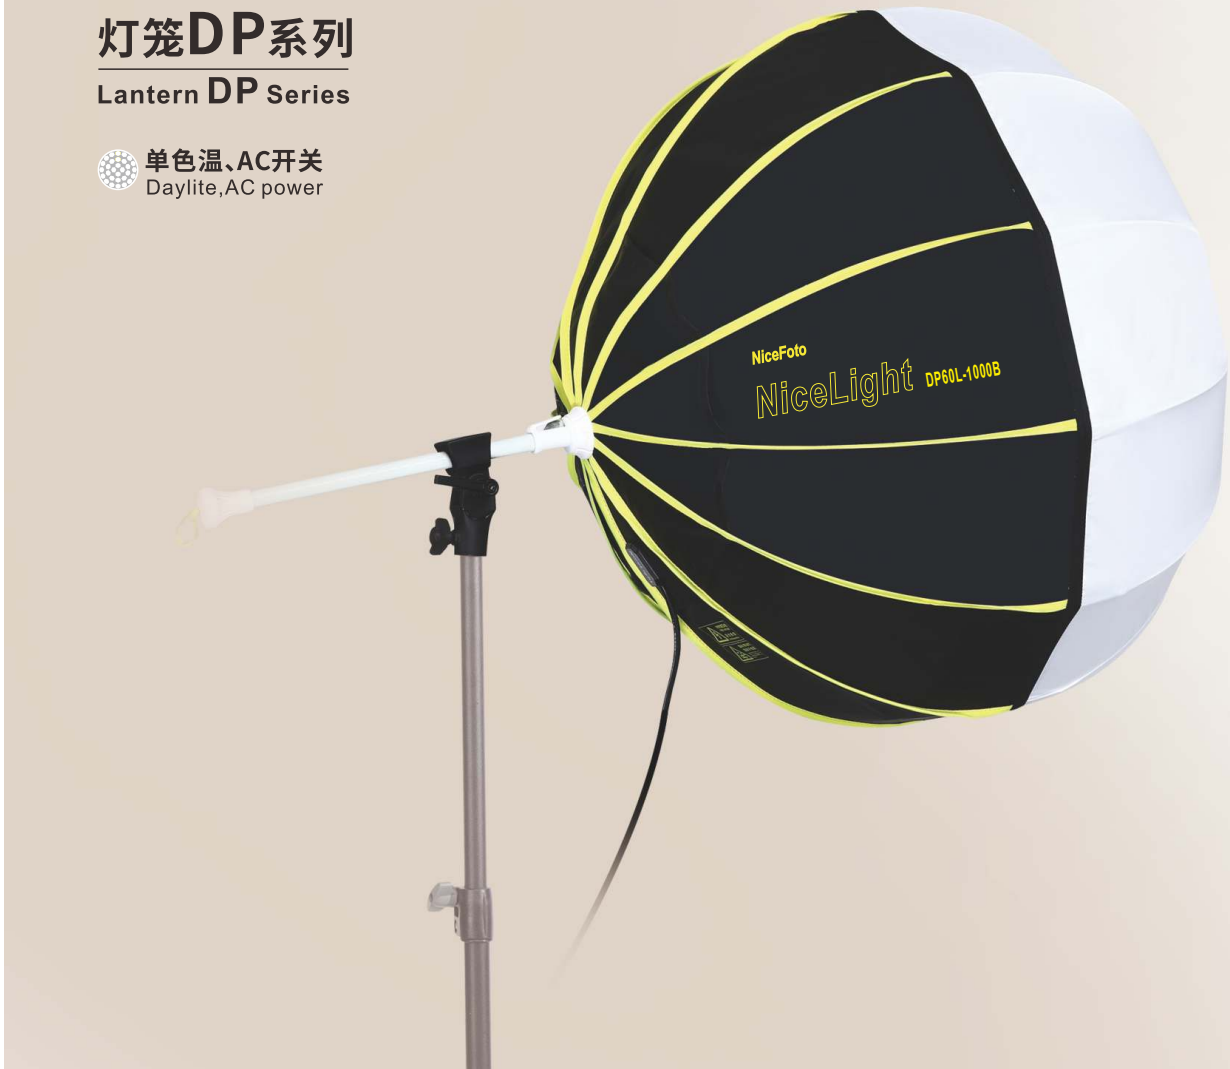

产品参数/Product parameters

型号 / Model	DP60L-1000B
货号 / Item No.	640374
功率 / Power	100W
灯体输入电压 / Input Voltage	AC220V 或 AC110V/AC220V Or AC110V
显色指数 / CRI	≥96
电视一致性照明指数 / TLCI	≥96
色温 / CCT	5600K ±200K
光通量 / Luminous flux	11000LM
功率调节 / Power adjustment	不可调节 / Non adjustable
散热 / Cooling way	自然散热 / Natural cooling
伞罩直径 / Umbrella cover diameter	φ60
伞罩深度 / Umbrella depth	53cm
收拢长度 / Folding Length	100cm
包装体积 / 重量 / Package size / weight	

伞罩灯

Umbrella Light


八角形DP系列

Octagonal DP Series

单色温、AC开关
Daylite, AC power



DP80-1000B | DP60-600B

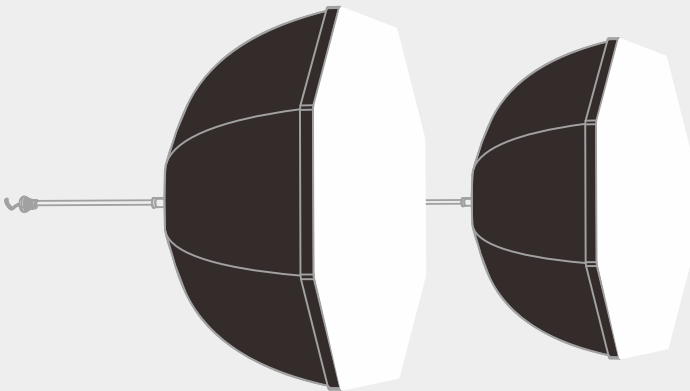

产品参数/Product parameters

型号 / Model	DP80-1000B	DP60-600B
货号 / Item No.	640384	640385
功率 / Power	100W	50W
灯体输入电压/ Input Voltage	AC220V 或 AC110V/AC220V Or AC110V	
显色指数/ CRI	≥96	
电视一致性照明指数/ TLCI	≥96	
色温/ CCT	5600K ±200K	
光通量/ Luminous flux	11000LM	5500LM
功率调节 / Power adjustment	不可调节/Non adjustable	
散热/ Cooling way	自然散热 / Natural cooling	
伞罩直径/Umbrella cover diameter	Φ80cm	Φ60cm
伞罩深度/Umbrella depth	35cm	30cm
收拢长度/Foldling Length	72cm	
包装体积/重量/Package size/weight		


伞罩灯

Umbrella Light


八角形DS系列

Octagonal DS Series

单色温、AC调光
Daylite, AC power

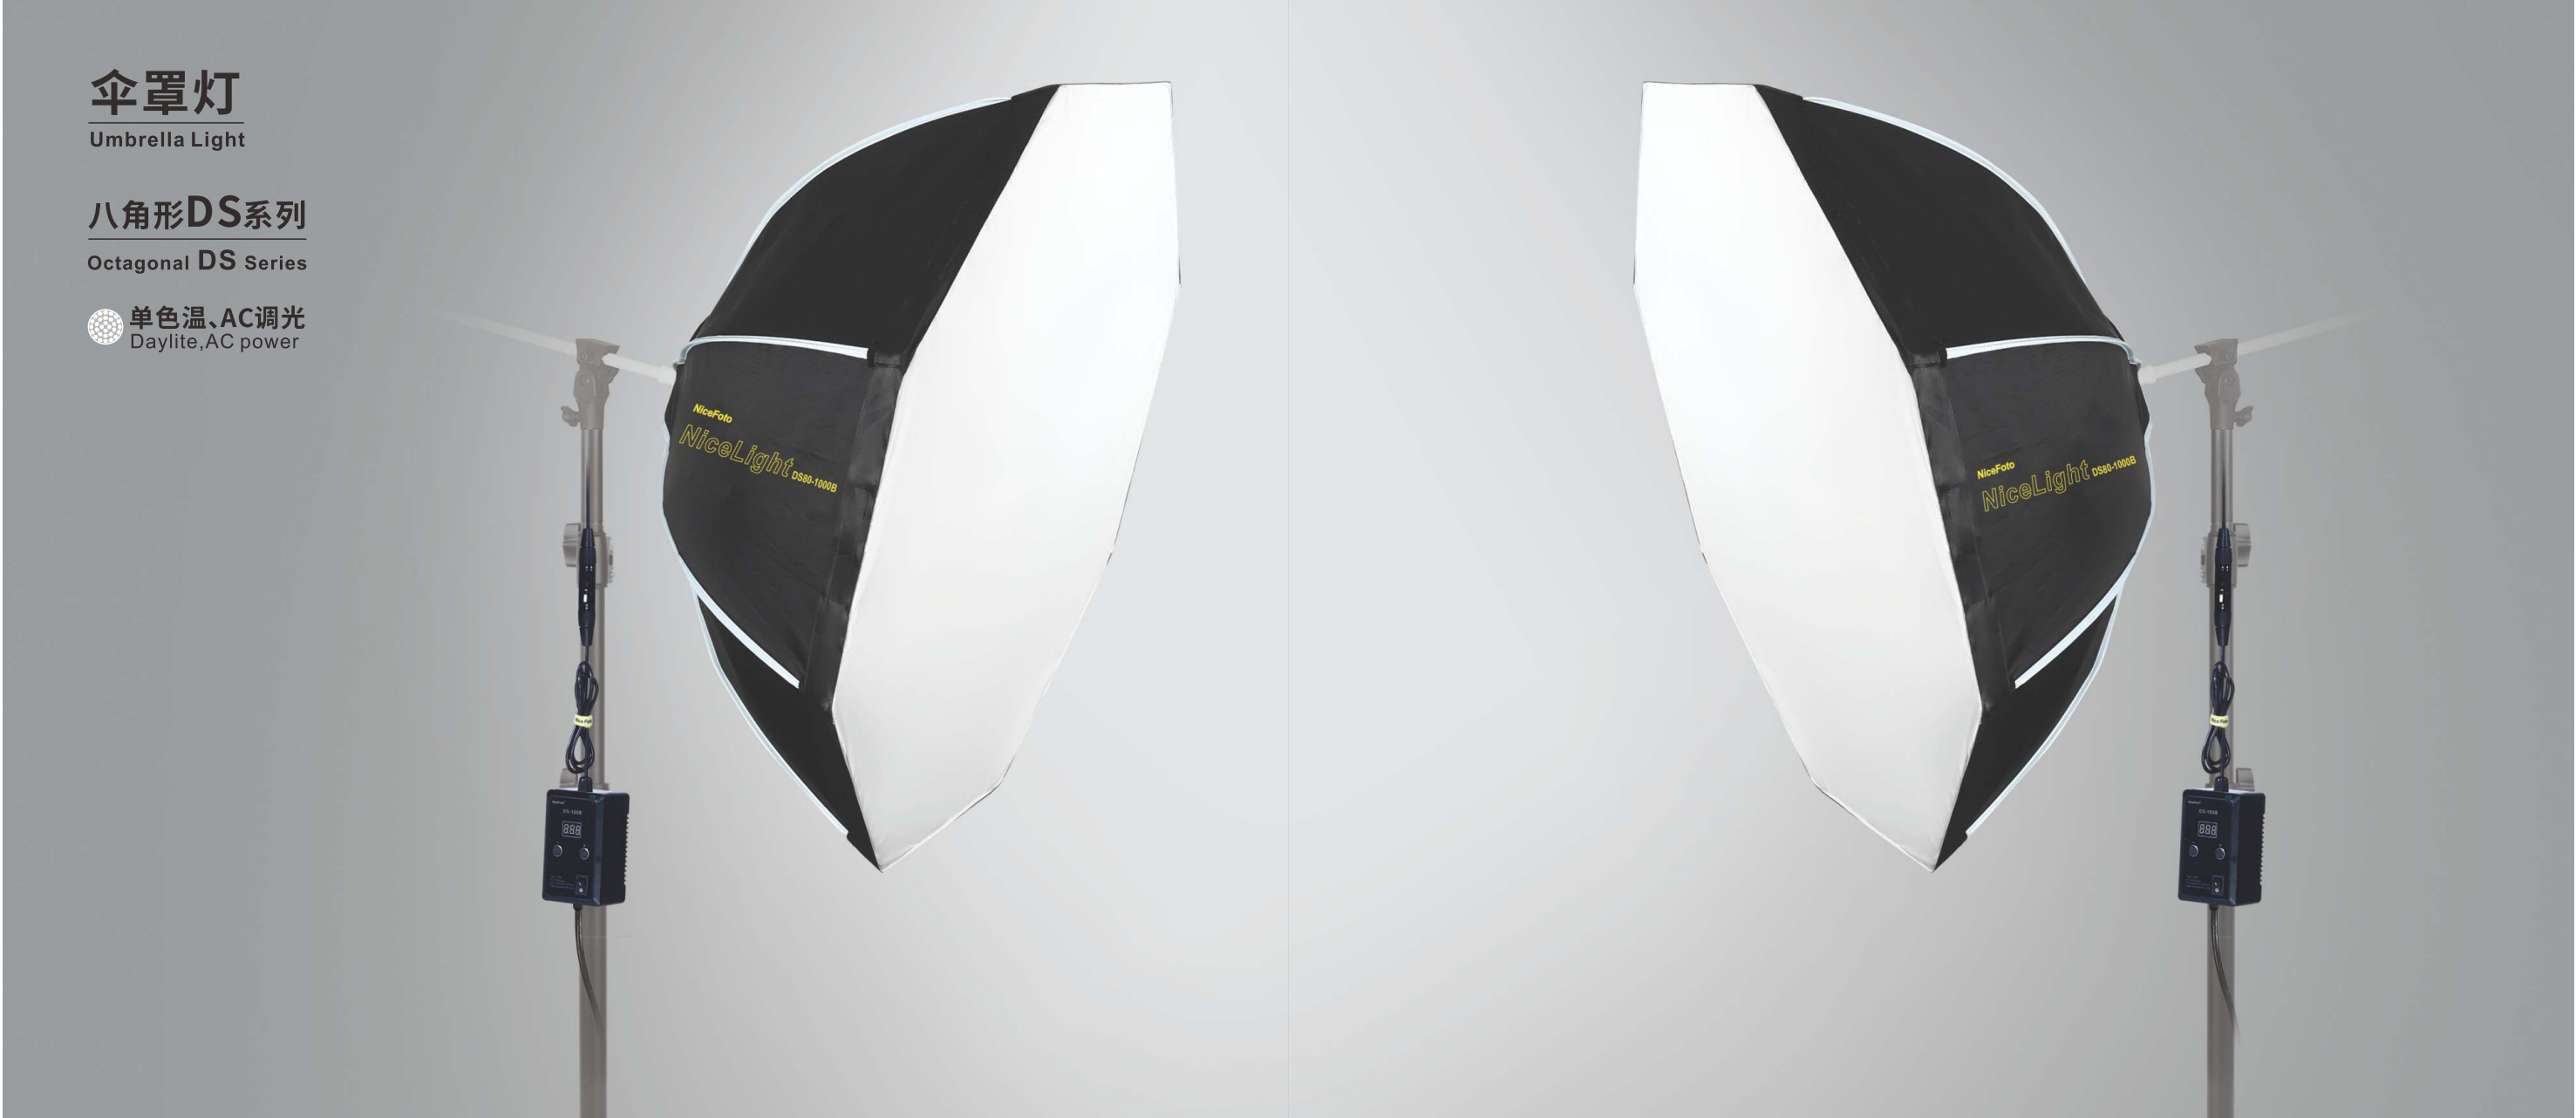

DS80-1000B | DS60-600B

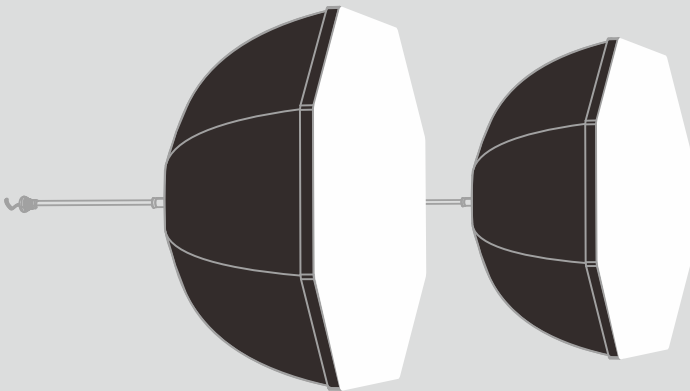

包装体积/重量/Package size/weight
SIZE:10x10x71cm(DP80-1000B)/

产品参数/Product parameters

型号 / Model	DS80-1000B	DS60-600B
货号 / Item No.	640387	640388
功率 / Power	100W	50W
灯体输入电压/ Input Voltage	DC72V	
显色指数/ CRI	≥96	
电视一致性照明指数/ TLCI	≥96	
色温/ CCT	5600K ±200K	
光通量/ Luminous flux	11000LM	5500LM
功率调节 / Power adjustment	无极调节/Infinite regulation	
散热/ Cooling way	自然散热 / Natural cooling	
伞罩直径/Umbrella cover diameter	Φ80cm	Φ60cm
伞罩深度/Umbrella depth	35cm	28cm
收拢长度/Foldling Length	72cm	48.5cm
包装体积/重量/Package size/weight	10x10x71cm/1.8Kg	58.5x15x14cm/1.3Kg

伞罩灯


Umbrella Light

八角形DP-R系列
Octagonal DP Series

单色温、AC遥控
Daylite, AC remote control



DP80R-1000B

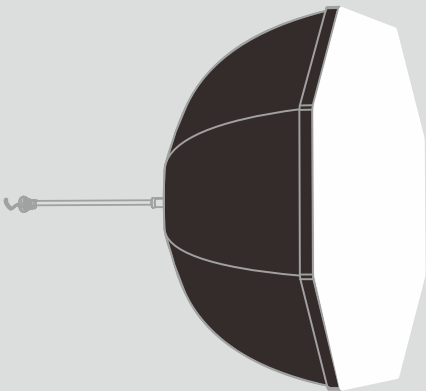

包装体积/重量/Package size/weight
71x10x11cm/1.4kg

产品参数/Product parameters

型号/Model	DP80R-1000B
货号/Item No.	640410
灯体输入电压/Input voltage	AC220V 或 AC110V/AC220V Or AC110V
显色指数/CRI	96
电视照明一致性指数/TLCI	96
色温/CCT	5600K±200K
光通量/Luminous flux	11000LM
功率调节/Power adjustment	0% / 50% / 75% / 100%
散热/Cooling way	灯体: 自然散热/Natural cooling
收拢长度/Folding Length	72cm
伞罩深度/Umbrella depth	35cm
伞罩直径/Umbrella cover diameter	Ø80cm
包装体积/重量 Package size / weight	71x10x11cm/1.4kg


伞罩灯

Umbrella Light

KT套装 八角形系列

KT Two-light kit Octagonal series

单色温、AC开关
Daylite, AC power

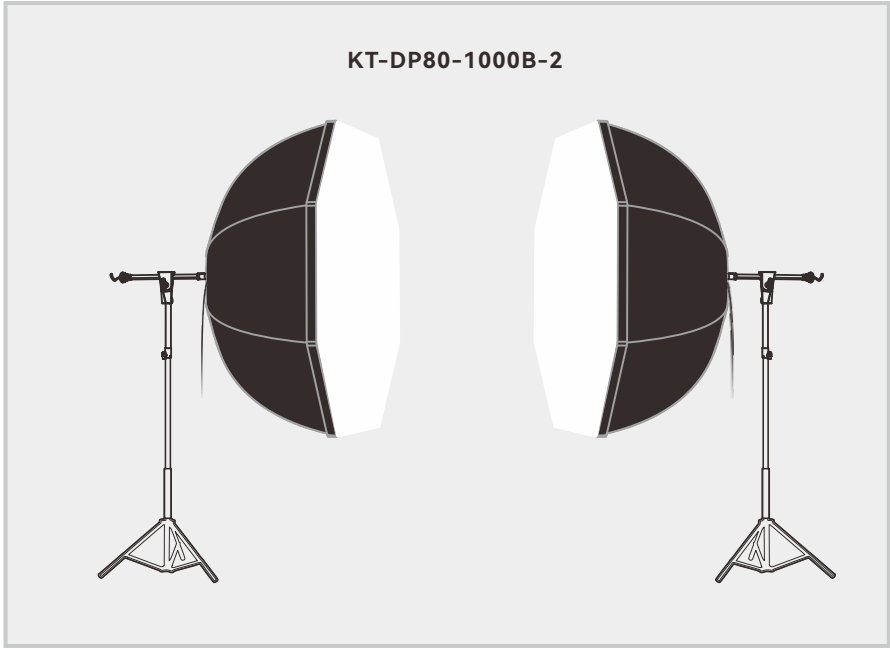

包装体积/重量/Package size/weight
19.5x19.5x78cm/5Kg

产品参数/Product parameters

型号 / Model	DP80-1000B
货号 / Item No.	640387
功率 / Power	100W
灯体输入电压/ Input Voltage	AC220V 或 AC110V/AC220V Or AC110V
显色指数/ CRI	≥96
电视一致性照明指数/ TLCI	≥96
色温/ CCT	5600K ±200K
光通量/ Luminous flux	11000LM
功率调节 / Power adjustment	不可调节/Non adjustable
散热/ Cooling way	自然散热 / Natural cooling
伞罩直径/Umbrella cover diameter	Φ80cm
伞罩深度/Umbrella depth	35cm
收拢长度/Foldling Length	72cm
包装体积/重量/Package size/weight	10x10x71cm/ 1.2Kg

灯架 / Light stand

型号 / Model	LS-200A
	2000mm
	850mm
	710mm
	1kg
节点 / Section	3
	Φ19, Φ22, Φ25
脚管 / Leg	16
	4.0kg
	780mm
材质 / Material	铝材 / Steel
灯架头 / Holder	



伞罩灯

Umbrella Light

方形DL系列

Rectangular DL Series

双色温、AC/DC电源调光盒
Bi color, AC/DC Power control box

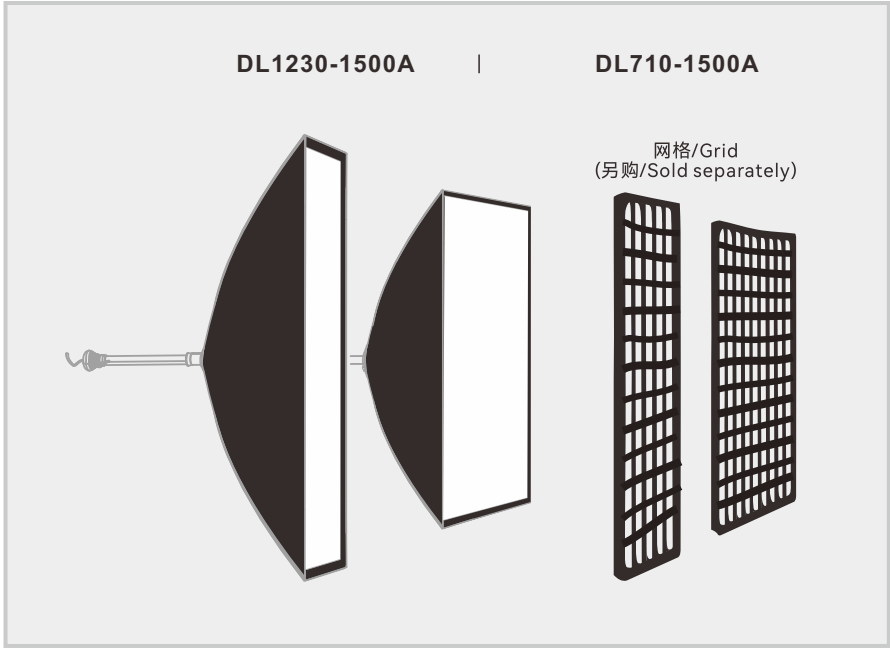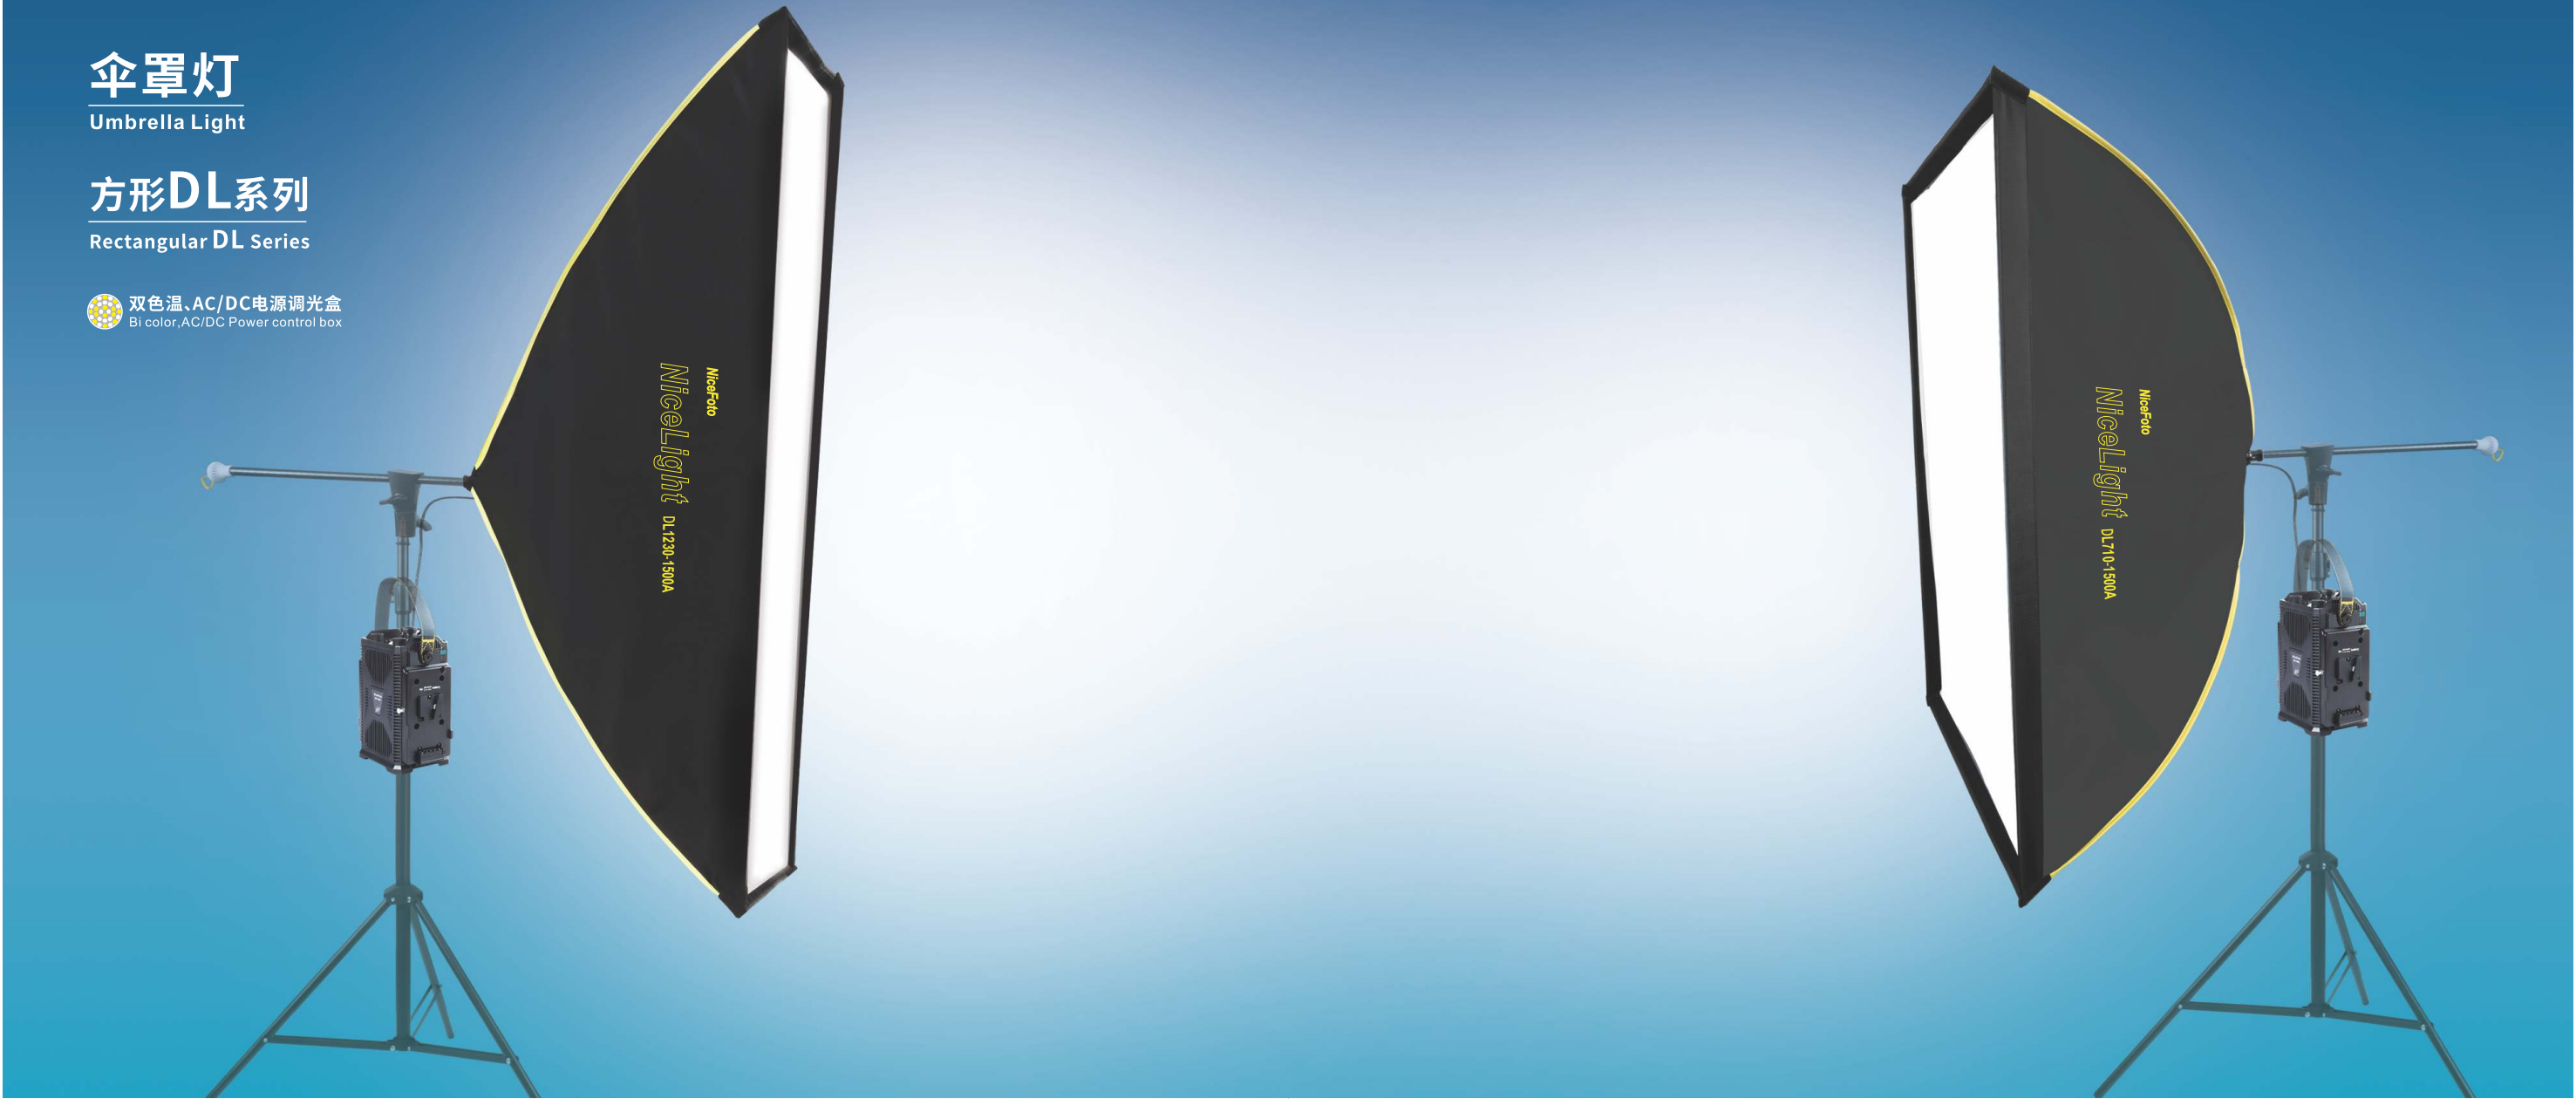

产品参数/Product parameters

型号 / Model	DL1230-1500A	DL710-1500A
货号 / Item No.	640377	640376
功率 / Power	150W	150W
灯体输入电压 / Input Voltage	DC54V-58V	
显色指数 / CRI	≥96	
电视一致性照明指数 / TLCI	≥96	
色温 / CCT	(2700K-6500K) ±200K	
光通量 / Luminous flux	15000LM	
功率调节 / Power adjustment	0% -100%	
场景光效模式 / Scene light mode	6种 / 6 kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30m	
散热 / Cooling way	灯体:自然散热 / Lamp body: Natural cooling	
	电源调光盒:静音风扇散热 / Power Dimming Box: Silent Fan Cooling	
电源调光盒 / Power dimming box	输入电压:AC100V-240V或DC14.8Vx2 / Input voltage:AC100V-240VOr DC14.8Vx2	
	输出电压:DC54V-58V / Output voltage:DC54V-58V	
灯体尺寸 / Dimensions	120x30cm	70x100cm
伞罩深度 / Umbrella depth	36cm	36cm
收拢长度 / Folding Length	78.5cm	79.5cm
包装体积 / 重量 / Package size / weight	19.5x18.5x94cm / 4.8Kg	19.5x18.5x94cm / 4.5Kg



伞罩灯

Umbrella Light

方形DF系列

Rectangular DF Series

双色温、AC电源调光盒
Bi color, AC Power control box

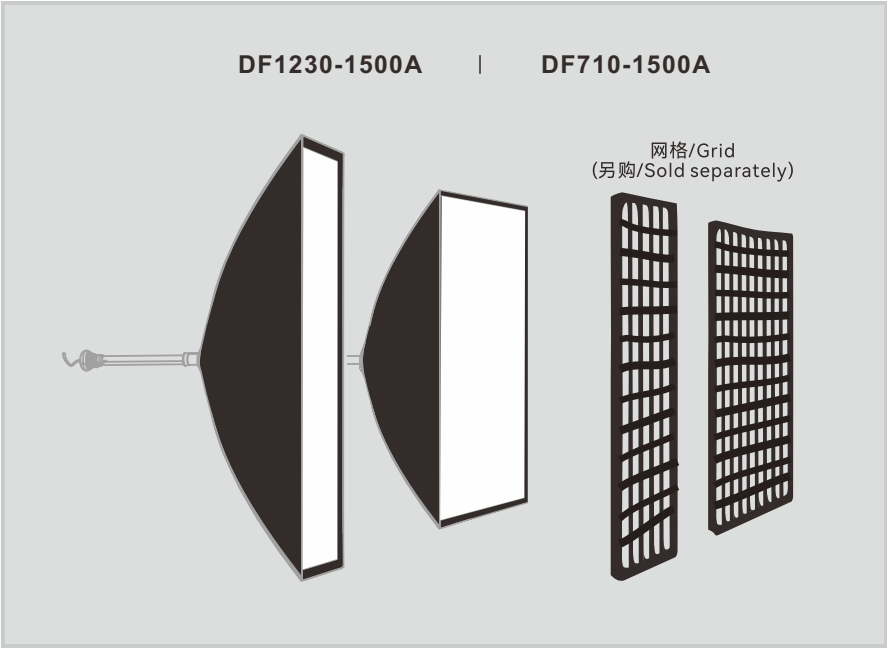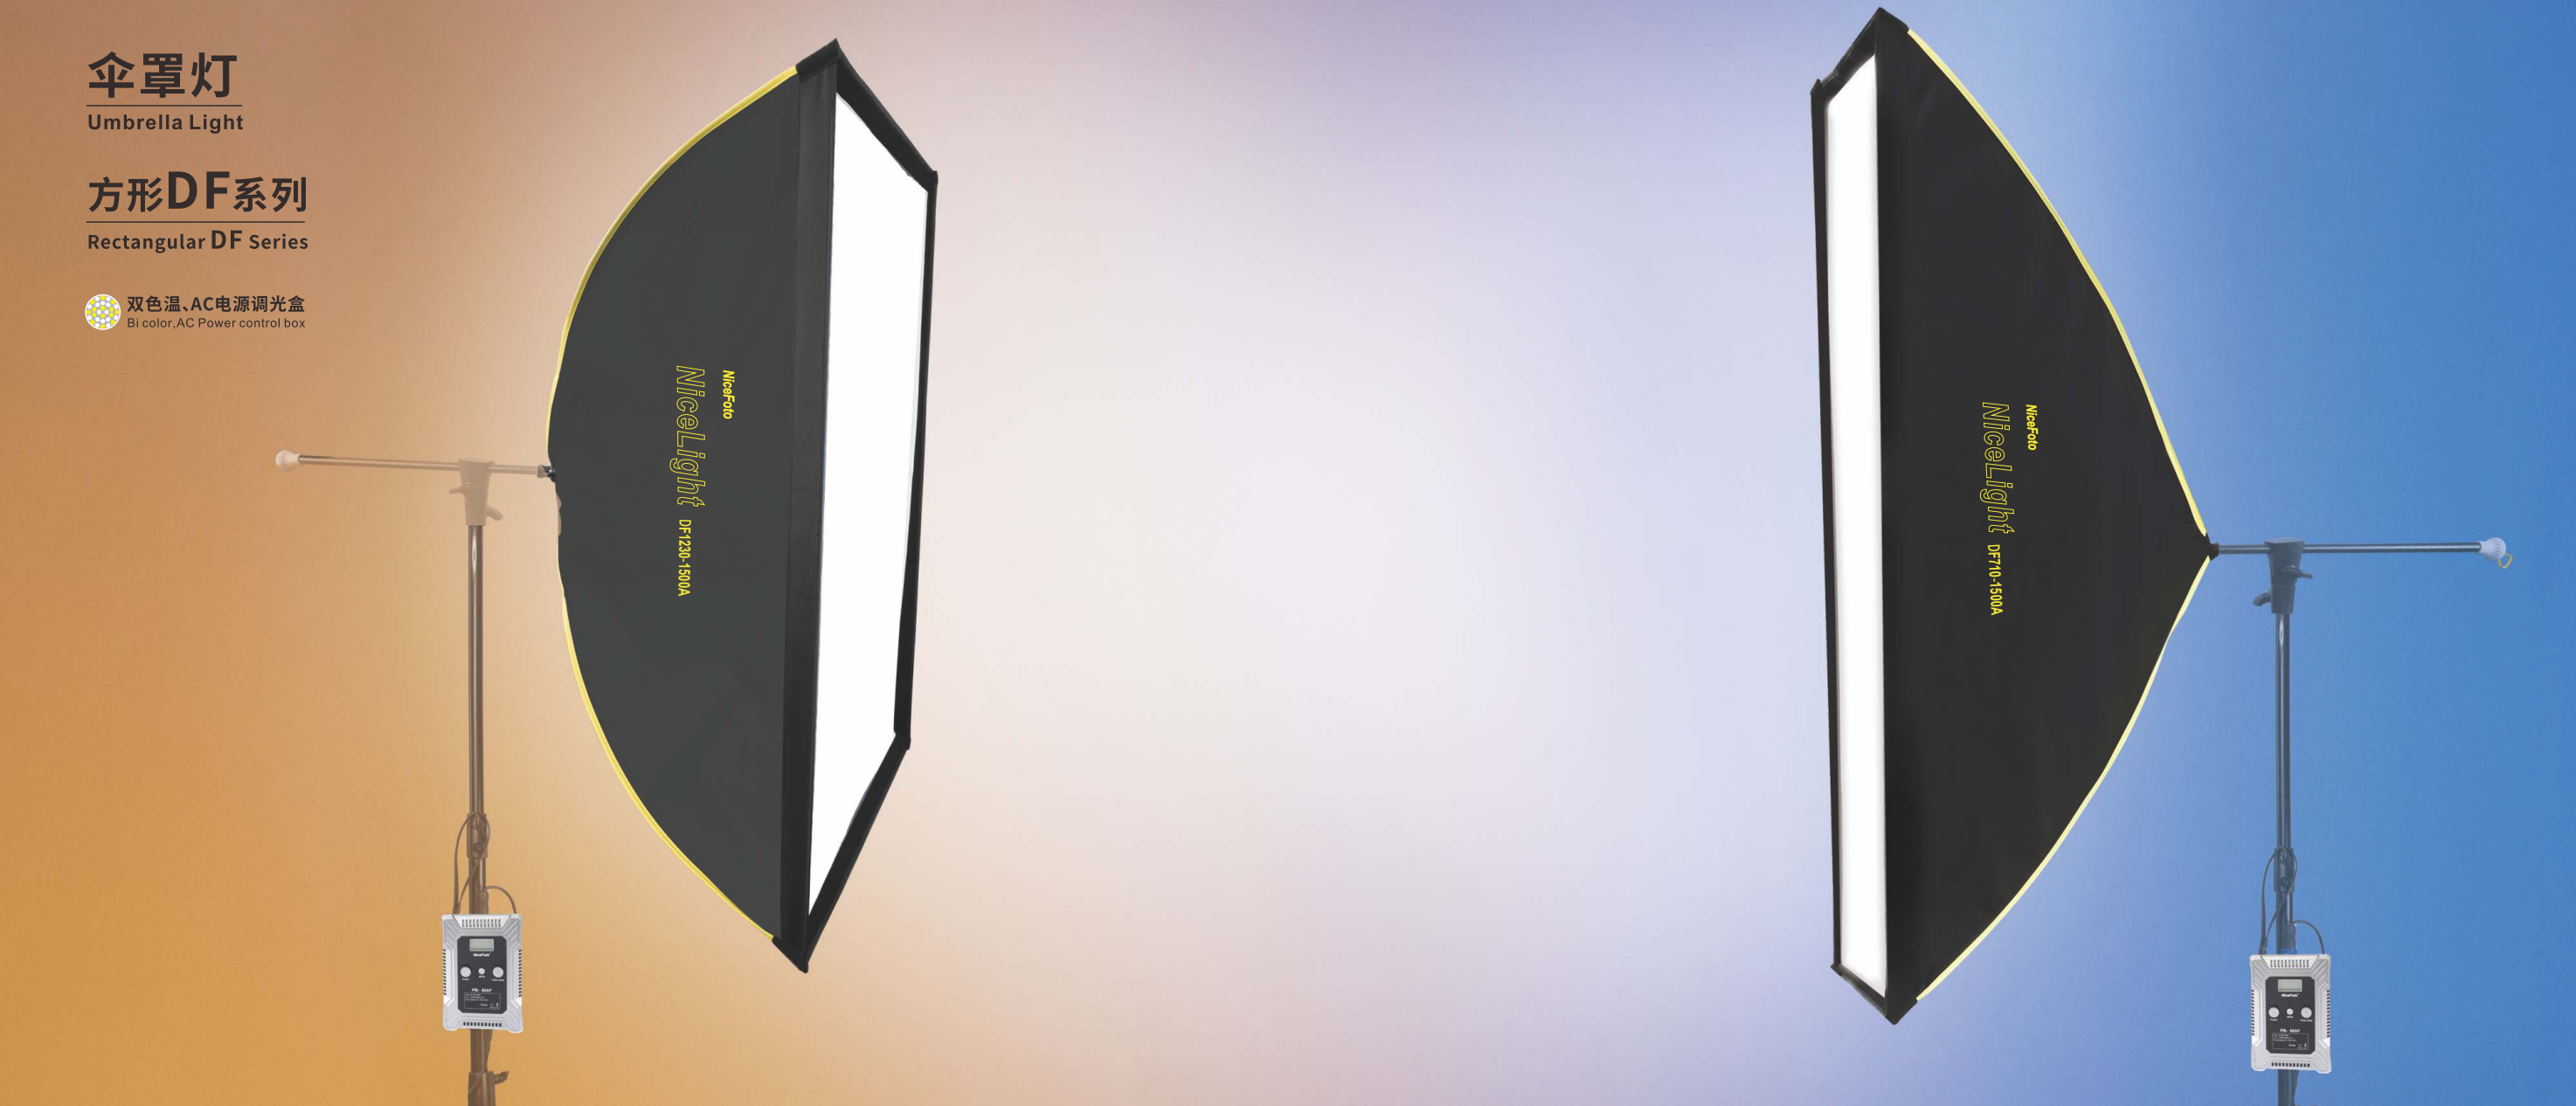

产品参数/Product parameters

型号 / Model	DF1230-1500A	DF710-1500A
货号 / Item No.	640405	640404
功率 / Power	150W	150W
灯体输入电压 / Input Voltage	DC160V-200V	
显色指数 / CRI	≥96	
电视一致性照明指数 / TLCI	≥96	
色温 / CCT	(2700K-6500K) ±200K	
光通量 / Luminous flux	15000LM	
功率调节 / Power adjustment	0% -100%	
场景光效模式 / Scene light mode	6种 / 6 kinds	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30m	
散热 / Cooling way	灯体:自然散热 / Lamp body: Natural cooling	
	电源调光盒:静音风扇散热 / Power Dimming Box: Silent Fan Cooling	
	输入电压:AC220V或AC110V / Input voltage:AC220V Or AC110V	
电源调光盒 / Power dimming box	输出电压:DC160V-200V / Output voltage:DC160V-200V	
灯体尺寸 / Dimensions	120x30cm	70x100cm
伞罩深度 / Umbrella depth	36cm	36cm
收拢长度 / Folding Length	78.5cm	79.5cm
包装体积 / 重量 / Package size / weight	15x14x93.5cm / 2.5Kg	

带网折叠布灯

Collapsible light with grid


轻羽VB系列
VB series

双色温/AC/DC电源调光盒
Bi color/AC+DC power control box



VB-2000A | VB-1000A

网格/Grid (标配/Include)

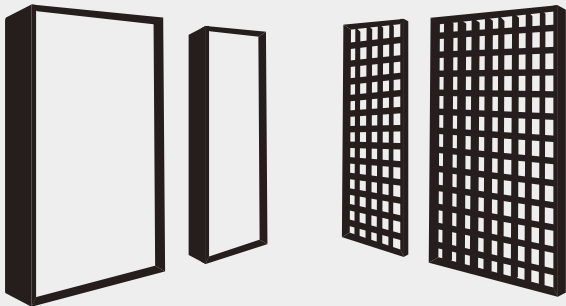

产品参数/Product parameters

型号 / Model	VB-2000A	VB-1000A
货号 / Item No.	640336	640335
功率 / Power	200W	100W
灯体输入电压 / Input Voltage	DC54V-58V	
显色指数 / CRI	≥96	
电视一致性照明指数 / TLCI	≥96	
色温 / CCT	(2700K-6500K) ±200K	
色相 / Hue	/	
光通量/Luminous flux	20000LM	10000LM
功率调节 / Power adjustment	0% -100%	
场景光效模式 / Scene lighting mode	6种	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30m	
散热/ Cooling way	灯体:自然散热 / Lamp body: Natur	
	电源调光盒: 静音风扇散热 / Power Dimming B	
电源调光盒/Power control box	输入电压:AC100V-240V 或DC14.8Vx2/Input voltage: AC100V-240V Or DC14.8Vx2	
	输出电压:DC54V-58V/Output voltage: DC54V-58V	
灯体尺寸/ Dimensions	60x70cm	60x30cm
包装体积/重量/Package size/weight	64.5x28.5x20.9cm/5.8kg	64.5x28.5x20.9cm/5.2kg

带网折叠布灯

Collapsible light with grid


轻羽VB系列
VB series

全彩、AC/DC电源调光盒
Full color, AC+DC power control box



VB-2000C | VB-1000C

网格/Grid (标配/Include)

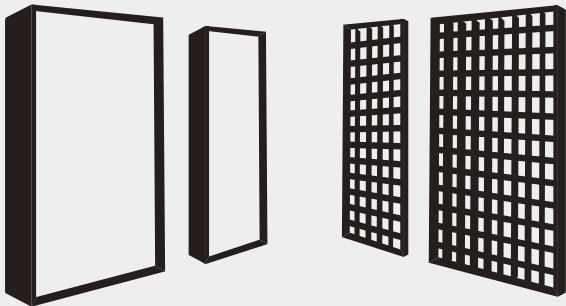

产品参数/Product parameters

型号 / Model	VB-2000C	VB-1000C
货号 / Item No.	640338	640337
功率 / Power	200W	100W
灯体输入电压 / Input Voltage	DC54V-58V	
显色指数 / CRI	≥96	
电视一致性照明指数 / TLCI	≥96	
色温 / CCT	(2700K-6500K) ±200K	
色相 / Hue	H000—H360	
光通量/Luminous flux	20000LM	10000LM
功率调节 / Power adjustment	0% -100%	
场景光效模式 / Scene lighting mode	18种	
内置接收 / Built-in receiver	APP	
遥控距离 / Remote distance	≤30m	
散热/ Cooling way	灯体：自然散热 / Lamp body: Natural cooling	
	电源调光盒：静音风扇散热 / Power Dimming Box: Silent Fan Cooling	
电源调光盒/Power control box	输入电压:AC100V-240V 或DC14.8Vx2/Input voltage: AC100V-240V Or DC14.8Vx2	
	输出电压:DC54V-58V/Output voltage: DC54V-58V	
灯体尺寸/ Dimensions	60x70cm	60x30cm
包装体积/重量/Package size/weight	64.5x28.5x20.9cm/5.8kg	64.5x28.5x20.9cm/5.2kg

带网折叠布灯

Collapsible light with grid


轻羽FB系列
FB series

双色温/全彩、AC电源调光盒
Bi color/Full color, AC power control box



FB-2000A | FB-1000A | FB-2000C | FB-1000C

网格/Grid (标配/Include)

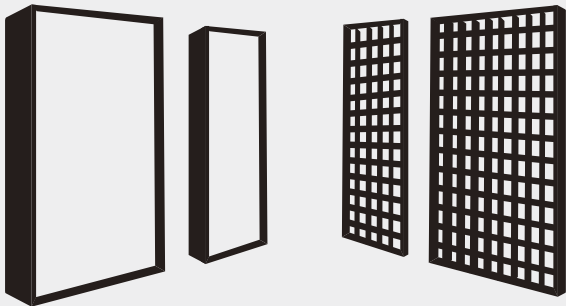

产品参数/Product parameters

型号 / Model	FB-2000A	FB-1000A	FB-2000C	FB-1000C
货号 / Item No.	640322	640321	640324	640323
功率 / Power	200W	100W	200W	100W
灯体输入电压 / Input Voltage	DC160V-200V			
显色指数 / CRI	≥96			
电视一致性照明指数 / TLCI	≥96			
色温 / CCT	(2700K-6500K) ±200K			
色相 / Hue	/		H000—H360	
光通量 / Luminous flux	20000LM	10000LM	20000LM	10000LM
功率调节 / Power adjustment	0% -100%			
场景光效模式 / Scene lighting mode	6种		18种	
内置接收 / Built-in receiver	APP			
遥控距离 / Remote distance	≤30m			
散热 / Cooling way	灯体：自然散热 / Lamp body: Natural cooling			
	电源调光盒：静音风扇散热 / Power Dimming Box: Silent Fan Cooling			
电源调光盒/Power dimming box	输入电压:AC180V-240V/ Input voltage: AC180V-240V			
	输出电压:DC160V-200V/ Output voltage: DC160V-200V			
灯体尺寸/ Dimensions	60x70cm	60x30cm	60x70cm	60x30cm
包装体积/重量/Package size/weight	64.5x28.5x20.9cm / 4.2kg	64.5x28.5x20.9cm /3.4kg	64.5x28.5x20.9cm / 4.2kg	64.5x28.5x20.9cm /3.4kg